

Velvet Batch - Paint



PRODUCT

双色天鹅绒

VELVET BATCH - PAINT

SGS





双色天鹅绒

VELVET BATCH

- Wanlei art paint appreciation manual -



VELVET BATCH PAINT

丝滑触感, 温柔的世界, 从一面墙开始
Silky satin touch, a gentle world, starting from a wall

拥有金属的光泽和绒面的质感, 它灵动的姿态, 洋溢着优雅的情调
Highly pearlescent type, dynamic and shining, writing the form of the golden years

色彩丰富绚丽, 让空间设计搭配更简单
Rich and gorgeous colors, making the space design with more simple



50%绒面
含固量



丝绒触感
丝滑顺手



法国A+
环保认证



轻奢质感
金属光泽



Construction method


施工方法：

- ① 使用前先将“双色天鹅绒”充分搅拌均匀
- ② 薄批“双色天鹅绒”一遍, 完全覆盖墙面
- ③ 点批“双色天鹅绒”两遍, 尽量抛光
- ④ 加水比例: 第一道加水比例<5%, 第二道施工不加水, 不要打磨最后一道


- ① Stir well the "Velvet Batch Paint" before use
- ② Thin batches of "Velvet Batch Paint", full cover of the wall
- ③ Dot "Velvet Batch Paint" two times, as far as possible to Polish
- ④ Water proportion: the first adding water ratio <5%, second road construction without water, do not wear the last one




RF-035S (50g x 4)

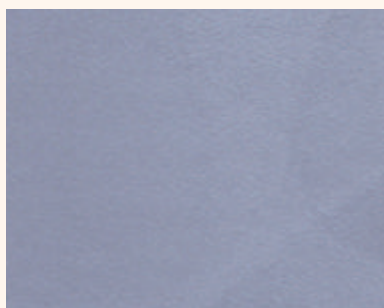

RF-036S (50g x 4)

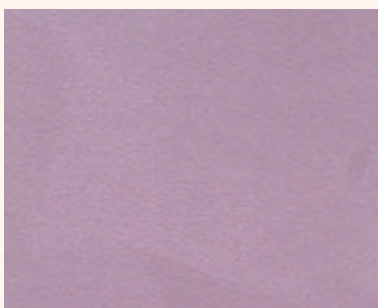


RF-037S (50g x 4)

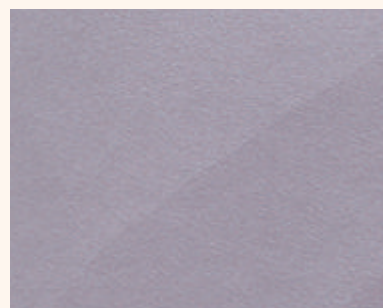

RF-038S (50g x 4)



RF-039S (50g x 4)

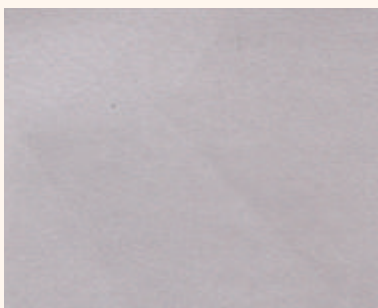

RF-040S (50g x 4)



RF-029S (50g x 4)



RF-030S (50g x 4)



RF-031S (50g x 4)



RF-032S (50g x 4)



RF-033S (50g x 4)



RF-034S (50g x 4)

Product information

产品信息

适用范围：高级的宴会厅、奢华的精品店、高端别墅、酒店等

Scope of application: An advanced banquet hall, a luxury boutique, a high-end villa, a hotel, etc.

配套工具：羊毛辊筒，不锈钢批刀

Construction tools: wool rollers, stainless steel knives



Velvet Batch

双色天鹅绒

双色天鹅绒,细致丝滑的触感让人感叹, 极致的效果带来华丽的感觉,它具有美观的天鹅绒布般效果,格外适用于室内装修。使用它,将带给您一个新颖别致、幽雅恬静的生活环境。

Velvet Batch - Paint, fine silk slippery touch makes people sigh.
The extreme effect brings gorgeous feeling. It has beautiful velvet effect and is especially suitable for interior decoration. Using it, it will bring you a novel,elegant and quiet life environment.



RF-001S (50g x 4)



RF-002S (50g x 4)



RF-003S (50g x 4)



RF-004S (50g x 4)



RF-005S (50g x 4)



RF-006S (50g x 4)




RF-007S (50g x 4)



RF-008S (50g x 4)



RF-009S (50g x 4)

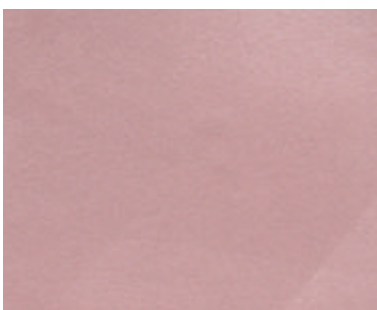

RF-010S (50g x 4)



RF-011S (50g x 4)



RF 012S (50g x 4)




RF-013S (50g x 4)

Environment

本产品不添加任何重金属等有害物质，不超出最新内墙装饰材料有害物质限量的国家标准，完全符合中国环境产品技术要求。

This product is fully in line with China's environmental product technology requirements.

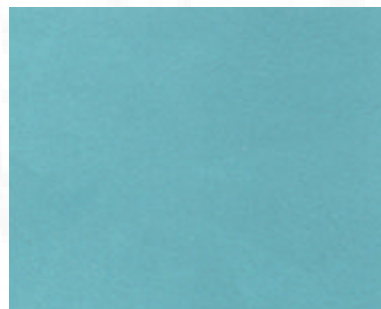

RF-014S (50g x 4)



RF-015S (50g x 4)



RF-016S (50g x 4)



RF-041S (50g x 4)



RF-042S (50g x 4)

■ 含固量约为50%

The metal pile has a solid content of about 50%

■ 珠光素雅, 拥有独特的绒毛质感

pearl and elegant, has a unique texture of villi

■ 无缝缝涂装, 无有害物质

seamless coating, no harmful substances



RF-017S (50g x 4)




RF-018S (50g x 4)



RF-019S (50g x 4)



RF-020S (50g x 4)

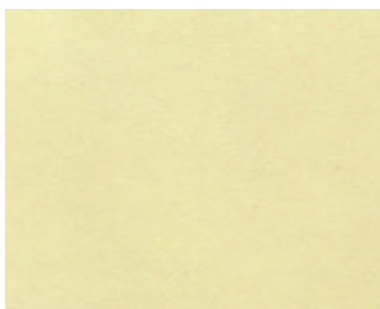


RF-021S (50g x 4)




RF-022S (50g x 4)



RF-023S (50g x 4)

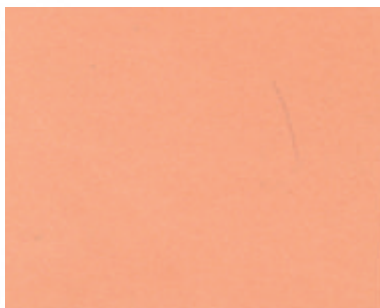

RF-024S (50g x 4)

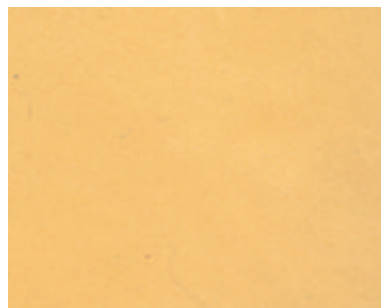


RF-025S (50g x 4)



RF-026S (50g x 4)



RF-027S (50g x 4)

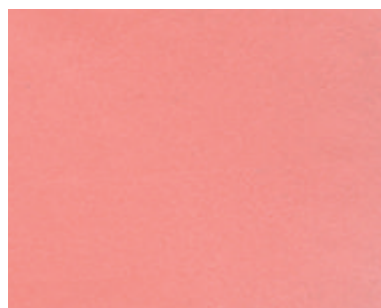


RF-028S (50g x 4)

双色天鹅绒 VELVET BATCH - PAINT

双色天鹅绒, 细致丝滑的触感让人感叹, 极致的效果带来华丽的感觉, 它具有美观的天鹅绒布般效果, 格外适用于室内装修。使用它, 将带给您一个新颖别致、幽雅恬静的生活环境

This Velvet Batch - Paint the feel and texture, with the luster of metal and the texture of velvet, the colour is soft and beautiful, the touch is silky and smooth, and its dynamic gesture is overflowing with elegant mood.

技术参数		Technical parameters	
材料性能	Material Properties	无溶剂(水基)	Solvent-free (water-based)
干膜厚度	Dry film thickness	0.1-0.2mm	0.1-0.2mm
理论覆盖率	Theoretical coverage	3-4m²/kg	2 - 3m²/kg
干燥时间(表干)	Drying time (surface drying)	< 2h (25-27°C)	< 2h (25-27°C)
干燥时间(硬)	Drying time (hard)	> 72h (25-27°C)	> 72h (25-27°C)
涂层	Coating layer	2次	2 times
使用寿命(内墙)	Shelf life (Interior wall)	> 10年	> 10 years
油漆颜色	Paint color	多色选择	Multi-color selection
施工方式	Application method	羊毛辊筒、批刀	Wool roller、trowel
贮存	Storage	5-35°C, 凉爽, 干燥	5-35°C, cool, dry

万磊天鹅绒家族		Product Features				
产品	双色天鹅绒	金属绸缎	金属丝绒	宫廷砂绒	出货标准	优秀标准
光泽	叠影珠光	绸缎高珠光	素雅哑光	磨砂哑光	均采用40色色浆 自由变幻120色	<div></div> <div>万磊艺术涂料获得 法国VOC标签A+认证</div>
触摸手感	流畅顺滑	丝滑绒面	质感手感	沙粒饱满		
施工方法	平批	辊涂、打磨纹理	辊涂、打磨	平批		
效果	/	/	/	/		
包装规格	5kg	4kg	4kg	4.5kg		
涂布率	15-20m²/5kg	12-16m²/4kg	12-16m²/4kg	10-12m²/4.5kg		

施工指南 Construction Guide



01

辊涂同色底漆两遍

Roll the same color primer twice



02

薄批双色天鹅绒主材1遍,待干


Thinly Velvet Batch Paint-batch 1 time, let it dry



03

不规则短刀批刮第二遍主材

Irregular walking and scraping with a short knife for the second time Thinly Velvet Batch Paint



04

第三遍不规则点批,批刮出纹理即可

The third time irregular points can scrape out the texture batch by batch

产品应用 Product Applications



- 高级的宴会厅
High-end banquet halls
- 奢华的精品店
Luxury boutiques
- 高端别墅
High-end villas
- 酒店等
Hotels, etc.

产品包装 Product Packaging



净含量 : 5kg/桶

Net content : 5kg/barrel

涂装面积 : 8-12m²

Painting area : 8-12sqm

桶尺寸 : 24*24*19cm

Barrel size : 24*24*19cm

扩展信息 Extended Information



双色天鹅绒TDS



小程序



施工教程



全景体验

双色天鹅绒 VELVET BATCH - PAINT

双色天鹅绒, 细致丝滑的触感让人感叹, 极致的效果带来华丽的感觉, 它具有美观的天鹅绒布般效果, 格外适用于室内装修。使用它, 将带给您一个新颖别致、幽雅恬静的生活环境。

This Velvet Batch - Paint the feel and texture, with the luster of metal and the texture of velvet, the colour is soft and beautiful, the touch is silky and smooth, and its dynamic gesture is overflowing with elegant mood.

主要成分 Main components

纳米乳、复合无机硅酸盐、珠光粉、进口绒粉、纯净水

Nano milk, compound inorganic silicate, pearlescent powder, imported velvet powder, pure water

产品特点 Product Features

- A、无缝涂装, 无有害物质
A. Seamless coating, no harmful substances
- B、珠光素雅, 拥有独特的绒毛质感
B. Pearly and elegant, with a unique fluffy texture
- C、含固量约为50%
C. The solid content is about 50%

适用范围 Scope of Application

适用于高级的宴会厅、奢华的精品店、高端别墅、酒店的内墙
Suitable for interior walls. High-end banquet halls, luxury boutiques, high-end villas, hotels, etc.

配套体系 Matching System

双色天鹅绒 + 底漆

配套工具 Matching tools

羊毛滚筒、批刀
wool roller, trowel

保质期 Shelf life

常温干燥状态下 12 个月 (原装出厂时)
12 months in a dry state at room temperature (at the time of original shipment)

基面要求 Substrate requirements

- ① 必须使用耐水腻子粉, 表面平整无脱落或掉粉现象
② (轻微) 掉粉时:
辊涂无机养护液 (兑水10-20%) 一遍, 12小时后再施工

① Water-resistant putty powder must be used, and the surface is smooth without peeling or powder phenomenon.
② (Slightly) powder:
Roller coating inorganic maintenance solution (water 10-20%) once, 12 hours before construction.




包装规格/Packaging: 5kg



耗材标准/Area: 2 - 3 m²/kg

万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地 (代码FS)
广东省佛山市南海区松岗万石工业区

广州分公司
广州市荔湾区羊城装饰材料市场118号

广西生产基地 (代码QT)
广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司
广西壮族自治区南宁市兴宁区快环建材市场

⚠ 注意
公司根据产品技术和发展需要, 有权对产品配方进行更新升级, 而不对外另行公布, 请以最新样板册颜色为准, 不便之处, 敬请原谅!

4000-147-187 www.fswanlei.com