



国家发明专利

专利号：201110461072.2 ZL

201510125090.1 ZL

201520259722.9 ZL

海藻米洞石色卡
TRAVERTINE

vanlei万磊®

U12A - 250301

自然与艺术 / 完美邂逅
万磊海藻米洞石系列

SERIES: TRAVERTINE



Nature and Art

自然与艺术 / 完美邂逅



无添加/
无甲醛、VOC挥发物



自洁性/
硬度高，不变色



调湿功能/
有效调节室内湿度



防霉抗菌/
防止墙面出现霉变



CN.

★ 技术参数

- 干膜厚度: 0.5-1mm
- 使用寿命: >10 年
- 干燥时间(表干): <2h(25-27°C)
- 干燥时间(硬): >72h(25-27°C)
- 涂层:2次

- 产品净重: 10 kg/袋
- 施工工具: 羊毛辊筒、批刀、专用抛光刀

- 执行标准: GB 18582-2020《室内装饰装修材料内墙涂料中有害物质限量》

- 色彩系统
- 产品代码
- 产品色号
- DSZ - 6271 (100g)
- 预调色
- 色浆克数

产品信息	参考用量
抗碱底漆	3 - 4m ² /kg
海藻米洞石 (平批)	1.5 - 2kg/m ²
擦色手蜡(可选)	6 - 8m ² /kg

配套体系



抗碱底漆

+



米洞石主材

+



擦色手蜡(可选)

EN.

★ Technical parameters

- Dry film thickness:0.5-1mm
- Coating layer:2 times
- Drying time (surface drying) :<2h(25-27°C)
- Drying time (hard) :>72h(25-27°C)
- Service life: > 10 years

- Net weight : 10 kg/bag
- Implementation standards:GB 18582-2020

- Tools : Wool Roller 、 batch knife, polishing knife

- Colour System
- Product Code
- Color Code
- DSZ - 6271 (100g)
- premixed color
- Gram of color paste

Product Information	Reference Dosage
Primers	3 - 4m ² /kg
Travertine	1.5 - 2kg/m ²
Color rubbing (optional)	6 - 8m ² /kg

Complementary system



Primers

+



Travertine

+



Color rubbing (optional)

施工方法 Construction step



① 辊涂1-2遍万磊沉浆砂底
Roll 1-2 times of Vanlei waterproof sand primer



② 用批刀薄批找平、压薄, 允许有漏底现象
Leveling and thinning with a batch knife, allowing for bottom leakage



③ 薄批第二遍, 表干后, 用批刀刮出纹理, 稍干后, 用批刀回压收光
③ 2nd coat, after the surface is dry, use a batch knife to scrape out the texture and finish.



④ 辊涂万磊金装内墙无痕灰泥罩面漆
Roller Coating Vanlei Gold Stainless Stucco Covering Paint for Interior Walls



净化空气/
Clean air



吸水透气 保温隔热/
Thermal insulation



防潮调湿/
Moisture management

NATURE AND ART / PERFECT ENCOUNTER.

自然与艺术 / 完美邂逅



DSZ - M40 (100g) - 石材灰



DSZ - M18 (100g) - 肩章灰



DSZ - 中砂基料 + DMJ - 502



墙面自洁/
Self-cleaning walls



防火阻燃
Fire resistant



吸音降噪/
Noise reduction



DSZ - 中砂基料



DSZ - 6273 (100g) - 蜜合色



DSZ - 6270 (100g) - 原1A07



DSZ - 6274 (100g) - 杏子灰



DSZ - 6271 (100g) - 原1A09



DSZ - 0102 (100g) - 五月花



DSZ - 6272 (100g) - 原1A03



DSZ - M29 (100g) - 夏雨灰



净化空气/
Clean air



吸水透气 保温隔热/
Thermal insulation



防潮调湿/
Moisture management




DSZ - 6275 (100g) - 菱花白



DSZ - 6276 (100g) - 可可蛋奶




DSZ - 6277 (100g) - 奶咖

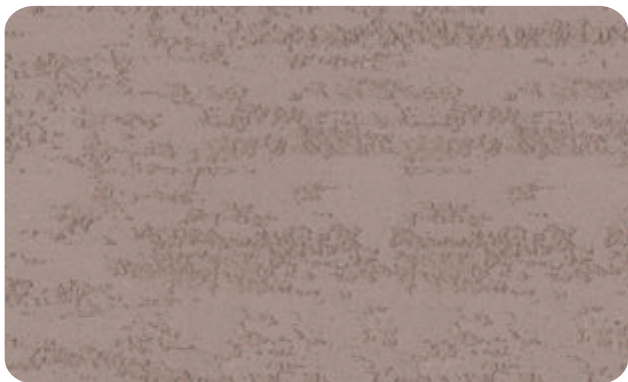

DSZ - 6278 (100g) - 布莱垦棕



细料 DSX - 6210 (100g) - 香槟夜色

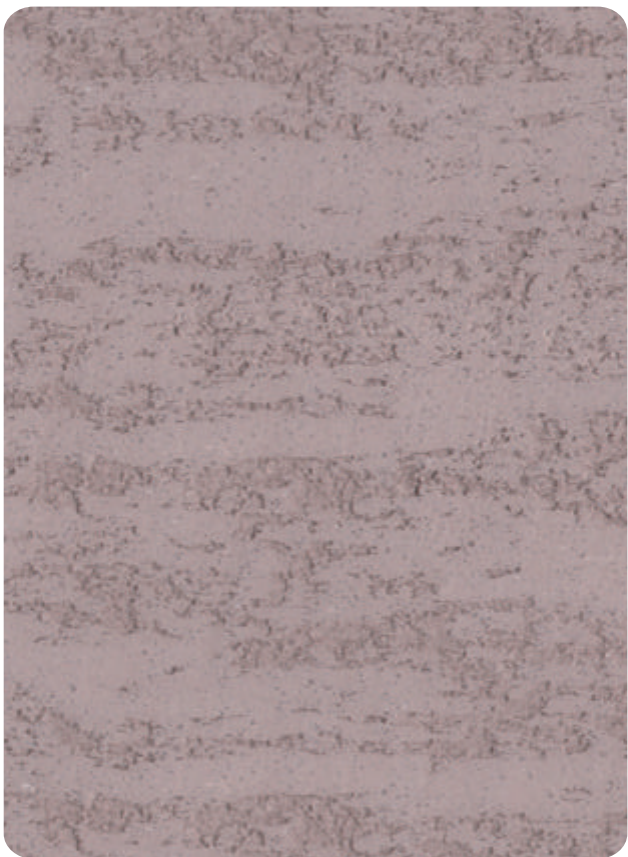

中料 DSZ - 6279 (100g) - 哔灰叽



墙面自洁/
Self-cleaning walls



防火阻燃
Fire resistant




吸音降噪/
Noise reduction



DSZ - 6280 (100g) - 汝窑



DSZ - M17 (100g) - 灰白

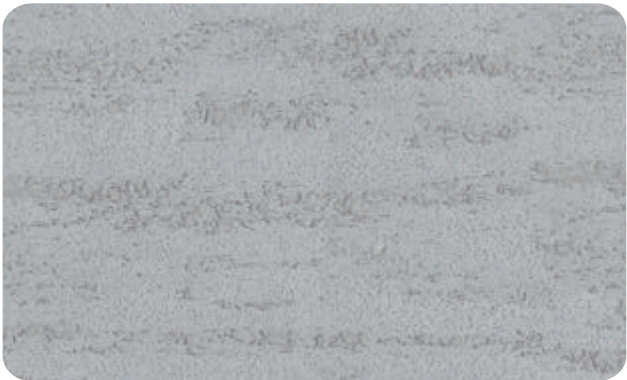


DSZ - 6281 (100g) - 太空漫步



DSZ - M41 (100g) - 铝灰




DSZ - 6282 (100g) - 灰纽扣

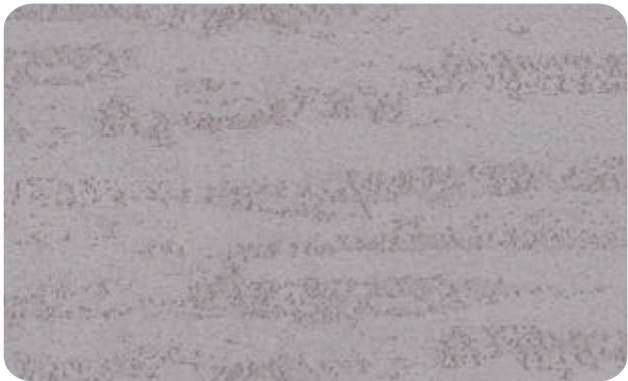

DSZ - M33 (100g) - 银烛台



DSZ - M58 (100g) - 水泥墙

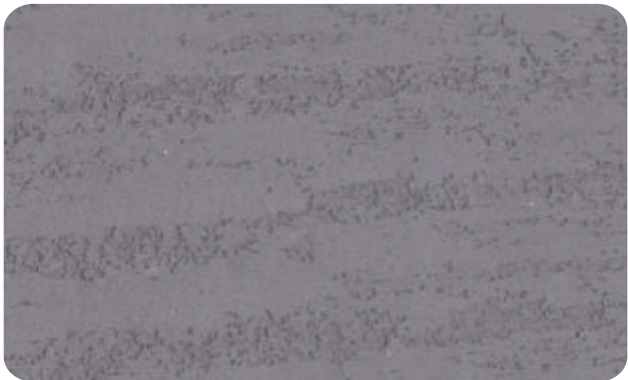

DSZ - M60 (100g) - 马蹄铁



CN

★ 万磊海藻米洞石系列

万磊海藻洞石为第三代硅藻泥衍生产品，设计灵感就来源于这种有着浓重古典气息与尊贵气质，其色泽与纹理变化，细腻与粗旷中寻求古朴典雅的自由气质。它不仅具有硅藻泥的吸收甲醛等功能，同时摒除石材的冰冷感与放射性，强烈的整体感使得这款产品深受大众喜爱

★ 产品功能

- ①无添加：零添加，无甲醛、voc挥发物
- ②自洁性：硬度高，不易留下刮痕，不变色，易清洁
- ③调湿功能：可以有效调节室内空气湿度，确保墙面无水珠流挂
- ④防霉抗菌功能：防止墙面出现霉变

★ 适用范围

广泛应用于高端别墅、住宅、酒店、娱乐场所、商业、休闲中心等内墙面装饰

★ 兑水比例

主材：水 10kg:4 - 4.5kg

★ 基面处理

- 参考环境条件温度=25℃，湿度≤60%
- ①基层应平整、干净无油污、空鼓，并具有较好的强度，方可施工
 - ②旧墙翻新：铲平基层，清除松动的表层部分，清洁粉尘油垢等杂质后方可施工
 - ③基材必须完全干燥无尘和盐渍，如有必要，使用特定产品重新铺设或加固表面

★ 施工步骤

- ① 按包装干粉与水比例调配，静置十分钟再重新搅拌后开始使用
- ② 然后用批刀薄批找平、压薄，可允许有漏底现象
- ③ 薄批第二遍，表干后，用批刀与墙面垂直刮出纹理
- ④ 稍干后即用批刀回压收光可制造出纹理
- ⑤ 选择擦色时，调出选好手蜡颜色在墙上擦出深浅不均色彩

EN

★ Vanlei Travertine Series

Vanlei travertine for the third generation of diatomite extended products, design inspiration comes from this has a strong classical flavor and noble temperament, its color and texture changes, delicate and rugged in the search for simple and elegant free temperament. It not only has the diatomite absorption of formaldehyde and other functions, while eliminating the coldness and radioactivity of the stone, a strong sense of the whole makes this product loved by the public!

★ Vanlei Travertine Series

- ①No additives: zero additives, no formaldehyde, voc volatiles
- ② self-cleaning: high hardness, not easy to leave scratches, does not change color, easy to clean
- ③ humidification function: can effectively regulate the indoor air humidity, to ensure that the wall without water beads hanging
- ④Anti-mold and anti-bacterial function: to prevent mold and mildew on the wall surface

★ Scope of application

Widely used in high-end villas, houses, hotels, entertainment venues, commercial, leisure centers and other interior wall decoration

★ Water Addition Ratio

Main: Water 10kg: 4 - 4.5kg

★ Priming

- Temperature=25℃, humidity≤60%.
- ① Grass-roots level should be flat, clean, no oil, drums, and has a good strength before construction
 - ② old wall renovation: shoveling the grass-roots level, remove the loose surface part, clean dust, grease and other impurities before construction
 - ③ The substrate must be completely dry and free of dust and salts, if necessary, use specific products to re-lay or reinforce the surface

★ Construction step

- ① According to the packaging of dry powder and water ratio mixing, let it rest for ten minutes and then re-mixed and start using it.
- ② and then use the batch knife thin batch leveling, pressure thin, allow the bottom of the leakage phenomenon
- ③ Thin batch of the second time, table dry, with a batch knife and the wall perpendicular to scrape out the texture
- ④ Once it dries, use a batch knife to press it back to a glossy finish to create texture.
- ⑤ When choosing the color of rubbing, call out the color of the selected hand wax and rub it on the wall to create uneven colors.



包装规格:10kg/桶 Packing specification: 10kg/bag



参考用量:1.5-2kg/m² Reference dosage: 1.5-2kg/m²



佛山市南海万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地（代码FS）

佛山市南海区狮山镇松岗万石管理区
象头岗万石村工业路2号

广州分公司

广州市荔湾区羊城装饰材料市场172号

广西生产基地（代码QT）

广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

△ 注意

公司根据产品技术和发展需要，有权对产品配方进行更新升级，而不对外另行公布，请以最新样板册颜色为准，不便之处，敬请原谅！

4000-147-187

www.fswanlei.com