



PRODUCT

浮光雪影

Pearlescent Effect



FGX - 251101

PEARLIE

浮光雪影
PEARLESCENT EFFECT

ESCENT

Pearlescent Effect

“万磊浮光雪影”配备有密度更高、更集中的珠光粉末
并根据光线的折射改变外观，有助于提升空间的整体亮度

浮光雪影
PEARLESCENT EFFECT






取材珍珠粉末, 品相出众
made of pearl powder, outstanding appearance



防水性革新
Newly upgrade formula, excellent waterproof




色彩鲜明, 手感细腻
Bright colors and delicate touch

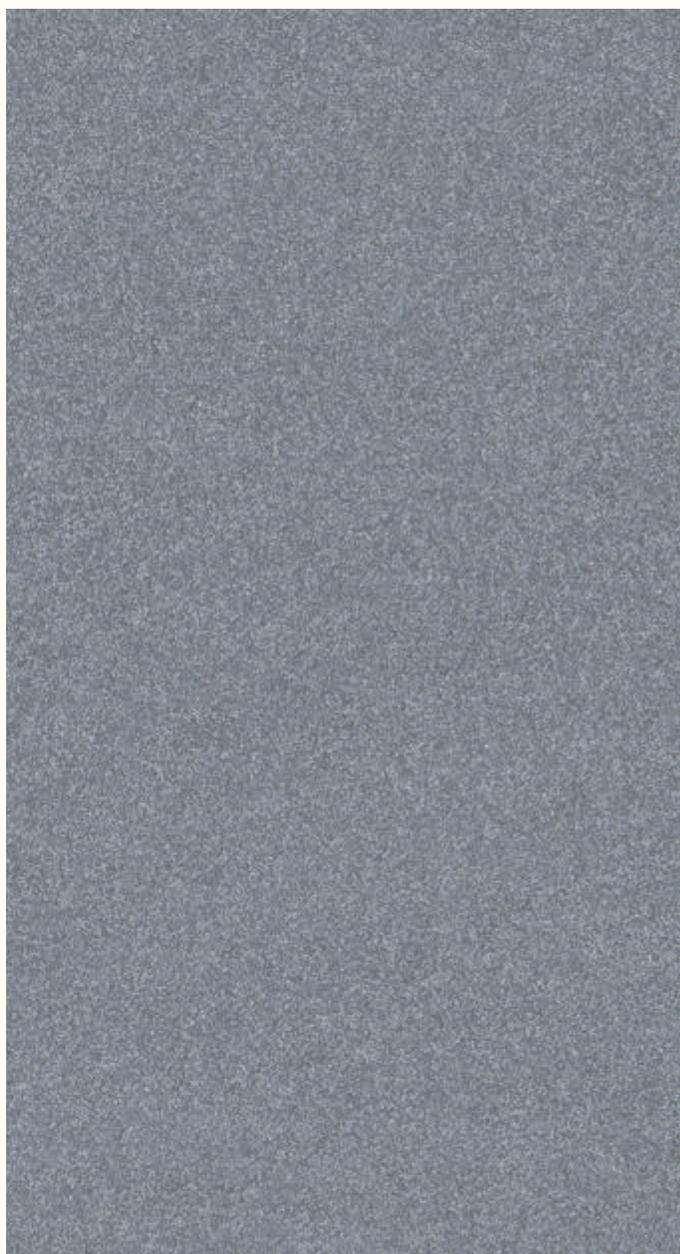

S底 - M23 (100gX2)

 FGX - M23 (100g)

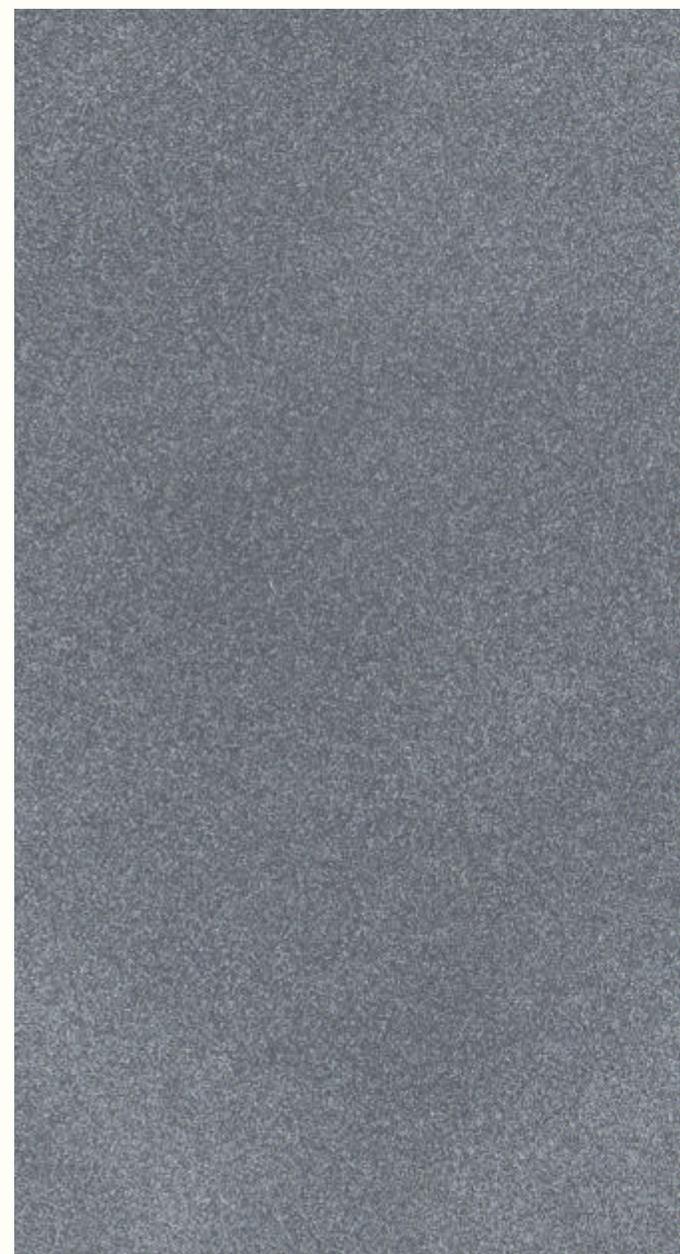

S底 - M23 (100gX2)

 FGX - M23 (100g)

浮光雪影

PEARL SHEEN EFFECT





S底 - M69 (100gX2)



FGX - M69 (100g)



S底 - M69 (100gX2)

FGX - M69 (50g)



S底 - M69 (100gX2)

FGX - M69 (30g)



S底 - M69 (100gX2)

FGX - M69 (10g)



S底 - M73 (100gX2)



FGX - M73 (100g)



S底 - M73 (100gX2)

FGX - M73 (50g)



S底 - M73 (100gX2)

FGX - M73 (30g)



S底 - M73 (100gX2)

FGX - M73 (10g)



S底 - M50 (100gX2)



FGX - M50 (100g)



S底 - M50 (100gX2)

FGX - M50 (50g)



S底 - M50 (100gX2)

FGX - M50 (30g)



S底 - M50 (100gX2)

FGX - M50 (10g)



S底 - M72 (100gX2)



FGX - M72 (100g)



S底 - M72 (100gX2)

FGX - M72 (50g)



S底 - M72 (100gX2)

FGX - M72 (30g)



S底 - M72 (100gX2)


FGX - M72 (10g)



S底 - M41 (100gX2)




FGX - M41 (100g)

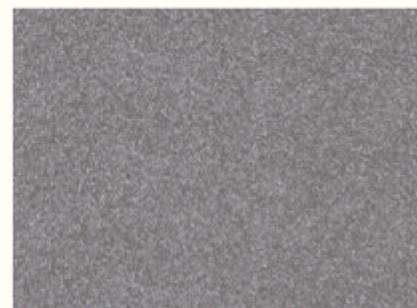


S底 - M41 (100gX2)

FGX - M41 (50g)

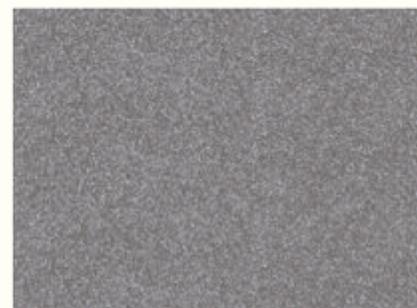

S底 - M41 (100gX2)

FGX - M41 (30g)

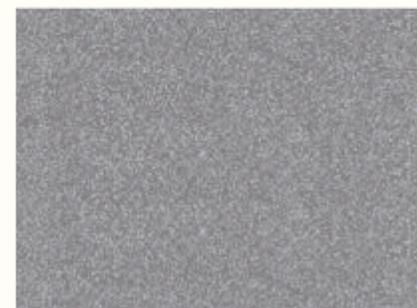

S底 - M41 (100gX2)

FGX - M41 (10g)



浮光雪影
PEARLESCENT EFFECT

“万磊浮光雪影”配备有密度更高、更集中的珠光粉末
并根据光线的折射改变外观,有助于提升空间的整体亮度

Pearlescent Effect





浮光雪影
PEARLESCENT EFFECT





S底 - M75 (100gX2)



FGX - M75 (100g)



S底 - M75 (100gX2)

FGX - M75 (50g)



S底 - M75 (100gX2)

FGX - M75 (30g)



S底 - M75 (100gX2)

FGX - M75 (10g)



S底 - M23 (100gX2)



FGX - M23 (100g)



S底 - M23 (100gX2)

FGX - M23 (50g)




S底 - M23 (100gX2)

FGX - M23 (30g)



S底 - M23 (100gX2)

FGX - M23 (10g)

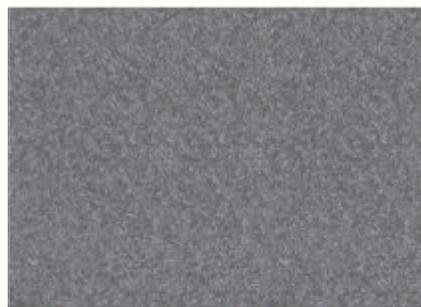

S底 - M80 (100gX2)



FGX - M80 (100g)



S底 - M80 (100gX2)

FGX - M80 (50g)



S底 - M80 (100gX2)

FGX - M80 (30g)



S底 - M80 (100gX2)

FGX - M80 (10g)



S底 - M55 (100gX2)



FGX - M55 (100g)



S底 - M55 (100gX2)

FGX - M55 (50g)



S底 - M55 (100gX2)

FGX - M55 (30g)



S底 - M55 (100gX2)

FGX - M55 (10g)



S底 - M84 (100gX2)



FGX - M84 (100g)



S底 - M84 (100gX2)

FGX - M84 (50g)



S底 - M84 (100gX2)

FGX - M84 (30g)



S底 - M84 (100gX2)

FGX - M84 (10g)



“万磊浮光雪影”配备有密度更高、更集中的珠光粉末
并根据光线的折射改变外观，有助于提升空间的整体亮度

Pearlescent Effect

vanlei 万磊®

浮光雪影
PEARLESCENT EFFECT



S底 - M81 (100gX2)



FGX - M81 (100g)

S底 - M81 (100gX2)

FGX - M81 (50g)



S底 - M81 (100gX2)

FGX - M81 (30g)



S底 - M81 (100gX2)

FGX - M81 (10g)



S底 - M51 (100gX2)

FGX - M51 (100g)



S底 - M51 (100gX2)

FGX - M51 (50g)



S底 - M51 (100gX2)

FGX - M51 (30g)



S底 - M51 (100gX2)

FGX - M51 (10g)



S底 - M42 (100gX2)

FGX - M42 (100g)



S底 - M42 (100gX2)

FGX - M42 (50g)



S底 - M42 (100gX2)

FGX - M42 (30g)



S底 - M42 (100gX2)

FGX - M42 (10g)

“

我们如何使用

浮光雪影
PEARLESCENT EFFECTHow Could We do with
Pearlescent Effect

施工工具 Construction tools

毛刷
brush批刀
Batch knife调色搅拌器
Color mixer羊毛辊筒
Wool roller

扫涂施工步骤 Brush construction steps




STEP 01

加入30-40%左右的清水稀释, 将主材搅拌均匀
Dilute with 30-40% water and stir the
main material evenly

STEP 02

辊涂一遍专用的同色底漆
Apply a special primer of the same color
on the roller once

STEP 03

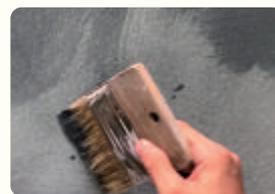不同方向扫刷主材
Sweep the main material in
different directions

STEP 04

相隔4-8小时第一道施工干燥后, 重复施工
After the first construction is dried 4-8
hours apart, repeat the construction

选择性施工: 干燥24小时后, 假如需要防水处理, 可选择使用罩面保护

Selective construction: After 24 hours of drying, if waterproof treatment is required, a cover can be used for protection

扩展信息 Extended Information

刷涂
教程批刮
教程

Pearlescent Effect

The 'Vanlei Pearlescent Effect' is equipped with denser and more concentrated pearl powder

And change the appearance according to the refraction of light, which helps to enhance the overall brightness of the space



参考用量 Reference Dosage



刷涂

4.5m² / kg / 2遍

brush coating

4.5m² / kg / 2 times



批涂

2.5m² / kg / 2遍

batch coating

2.5m² / kg / 2 times

批刮施工步骤 Scratching construction steps



STEP 01

加入5%左右的清水稀释, 将主材搅拌均匀

Dilute with 5% water and stir the main material evenly



STEP 02

辊涂同色沉浆砂底漆(可添加25%水)两遍
均匀覆盖即可

Roller coating with the same color sinker sand primer
(25% water can be added) Twice for even coverage



STEP 03

用批刀薄批主材找平1遍
均匀覆盖即可

Use a thin batch knife to level the main material once
Uniform coverage is sufficient



STEP 04

不规则平批主材1遍
边批边收掉多余的余料

Irregular flat batch main material once
Collect excess materials while batch processing



选择性施工:干燥24小时后, 假如需要防水处理, 可选择使用罩面保护

Selective construction: After 24 hours of drying, if waterproof treatment is required, a cover can be used for protection

其他信息 Other information



浮光雪影 PEARLESCENT EFFECT

“万磊浮光雪影”配备有密度更高、更集中的珠光粉末，并根据光线的折射改变外观，有助于提升空间的整体亮度

The Vanlei Pearlescent Effect is equipped with a denser and more concentrated pearl powder, which changes its appearance according to the refraction of light, helping to enhance the overall brightness of the space

主要成分	净味乳液、煅烧型高岭土、珠光粉末、纤维素、纯净水		
兑水比率	批涂加水5%左右, 扫涂加水30-40%左右	产品净重	5kg/桶
色系选择	可参考万磊浮光雪影 (Pearlescent Effect) 色卡	保质期	常温干燥状态下24个月 (原装出厂时)
Ingredient	Purified lotion, calcined kaolin, pearlescent powder, cellulose, purified water		
water ratio	Batch coating about 5%, sweeping coating about 30-40%	Net Weight	5kg/barrel
Color Choice	See the Vanlei (Pearlescent Effect) color swatch.	Shelf life	24 months in a dry state at room temperature

CN

适用场景

欧式风格如:高级的欧式宴会厅、酒店大堂、典雅别墅、奢华的精品店等

基面要求

- ①水泥砂浆基面需要保养6天以上, PH小于11度
- ②中性腻子, 找平、打磨、去尘后可以直接施工
- ③砂浆基底需要施工腻子粉找平打磨, 碱性腻子要保养15天左右
- ④旧墙翻新时, 需要基面平整无裂纹, 无脱落, 无起鼓, 无灰尘, 无油渍污垢

执行标准

GB 18582-2020 《室内装饰装修材料内墙涂料中有害物质限量》

环保承诺

本产品不添加任何重金属等有害物质, 不超出最新内墙装饰材料有害物质限量的国家标准, 完全符合中国环境产品技术要求

注意事项

- 1、使用主材料之前, 请充分搅拌均匀
- 2、请有效分隔、覆盖和遮蔽木质品与墙面的区域
- 3、气温低于10°C, 相对湿度大于80%情况下不能施工
- 4、同型号不同批次产品会存在色差

技术支持

如需帮助, 请咨询万磊公司 (0757-81760676)

干燥时间

 1-2小时内
触干

 8-12 小时后
涂层之间重复施工

EN

Applicable Scenarios

European style, such as high-end European banquet halls, hotel lobbies, elegant villas, luxurious boutique shops, etc

Substrate requirements

- ①Cement mortar base needs to be maintained for more than 6 days, PH less than 11 degrees.
- ② Neutral putty, leveling, sanding, dust can be directly after construction
- ③The mortar base needs to be leveled and polished with putty powder, and the alkaline putty should be maintained for about 15 days.
- ④When renovating the old wall, the base surface needs to be flat and free of cracks, peeling, bulging, dust and oil stains.

Implementation standards: GB 18582-2020

Environmental Commitment

This product does not contain any harmful substances such as heavy metals, and does not exceed the latest national standards for harmful substances in interior wall decoration materials, Fully comply with the technical requirements of environmental products in China

Precautions

1. Before using the main material, please mix thoroughly and evenly
2. Please effectively separate, cover, and shield the area between wooden products and walls
3. Construction cannot be carried out when the temperature is below 10 °C and the relative humidity is above 80%
4. There may be color differences between products of the same model but different batches

Technical Support: If you need assistance, please consult Vanlei Company (0757-81760676)

drying time

 Within 1-2 hours
Touch dry

 After 8-12 hours
Repeat between coats

佛山市南海万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地 (代码FS)

佛山市南海区狮山镇松岗万石管理区
象头岗万石村工业路1、2、5号

广州分公司

广州市荔湾区羊城装饰材料市场172号

广西生产基地 (代码QT)

广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

⚠ 注意

公司根据产品技术和发展需要, 有权对产品配方进行更新升级, 而不对外另行公布, 请以最新样板册颜色为准, 不便之处, 敬请原谅!

4000-147-187 www.fswanlei.com