



PRODUCT

魔力改色漆

Magical color paint



MLGS - 260301

All Covered

魔力改色 | 全材匹配



A small bucket a great capability

小蓝桶，特别在这 /
一小桶，大能力

你不喜欢，就改掉！活性高分子树脂改色原材
确保它拥有超高强度和附着力的魔力改色漆
喜欢什么改什么！

这是一种丙烯酸树脂固化系统
可以在选择的覆盖表面提供出色的效果
这是一种创新的涂层，具有良好的化学阻力




If you don't like it, change it! Active polymer resin color-changing raw material
Ensure it has a magic color-changing paint with ultra-high strength and adhesion
Change whatever you like!

This is an acrylic resin curing system
It can provide excellent effects on the selected covering surface
This is an innovative coating with excellent chemical resistance


dark series / 深色系列




GSS - E3040 (100g)

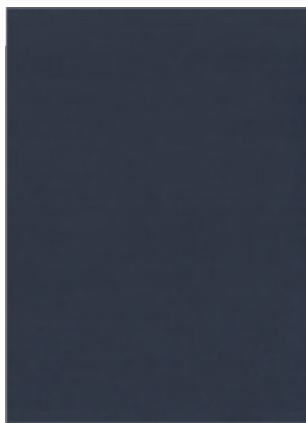

GSS - E3041 (100g)

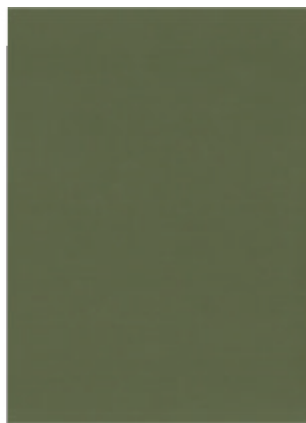

GSS - M48 (500g)

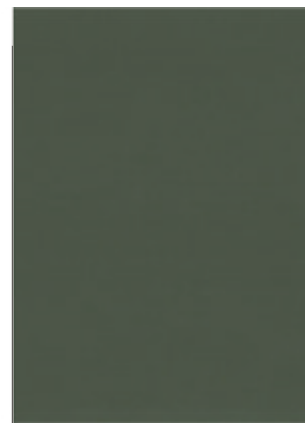


GSS - 0835 (500g)




GSS - E3030 (500g)



GSS - E3031 (500g)

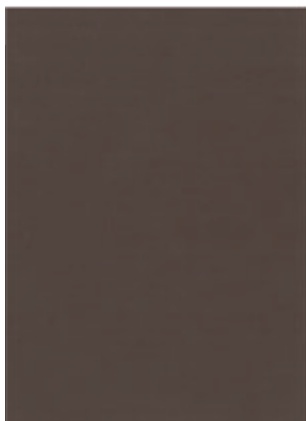

GSS - E3032 (500g)

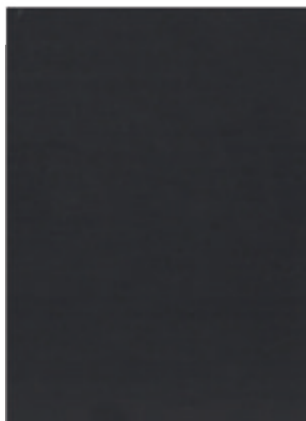

GSS - E3035 (100g)



• 木质材质
wooden material



• 金属材质
metal material
(限定部分金属界面)



• 瓷砖材质
Ceramic tile material
(釉质砖界面须另行处理)



• 玻璃材质
glass material



“魔力改色漆” *Magical Color*
all materials
match **全材质匹配!**




Diamond Whiteseries
— 菱花白系列




GSQ - 6275 (10g)



GSQ - 6275 (30g)

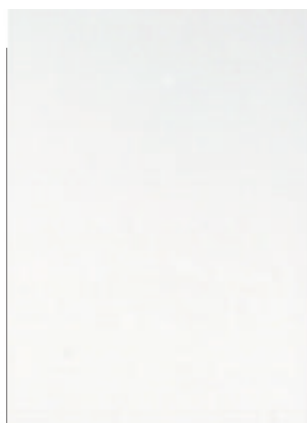


GSQ - 6275 (50g)

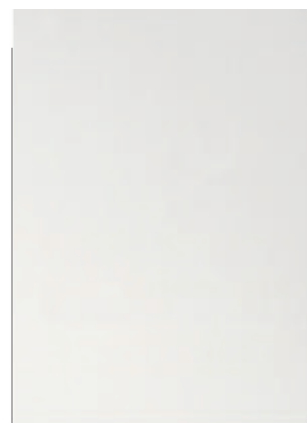


GSQ - 6275 (100g)


Yellow series
— 缃色系列

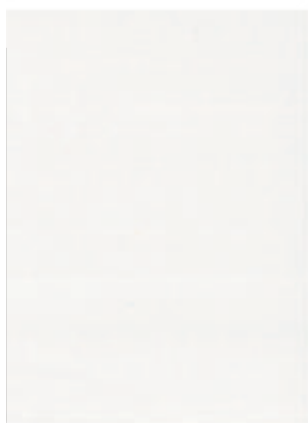


GSQ - 6259 (10g)

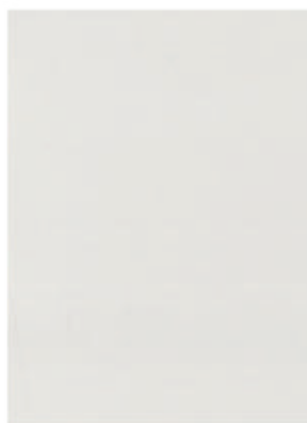

GSQ - 6259 (30g)

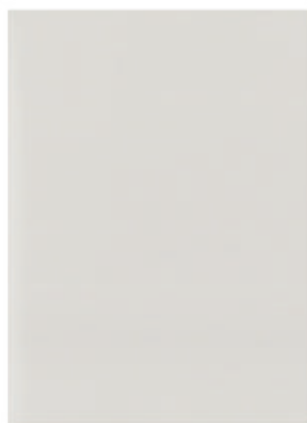


GSQ - 6259 (50g)

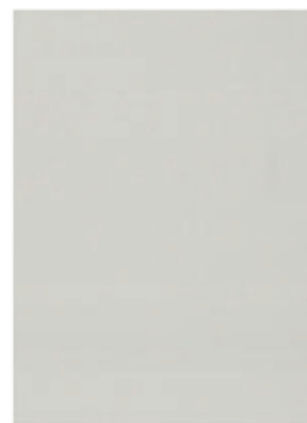


GSQ - 6259 (100g)

Ru kiln series
— 汝窑系列

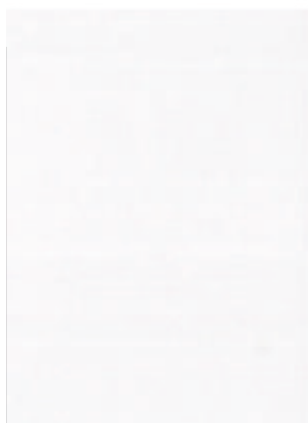


GSQ - 6280 (10g)

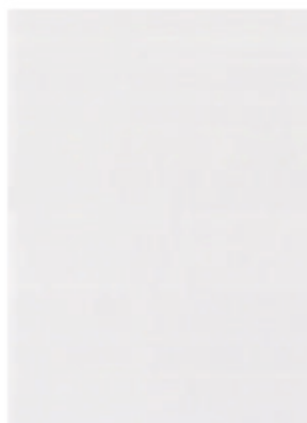

GSQ - 6280 (30g)



GSQ - 6280 (50g)

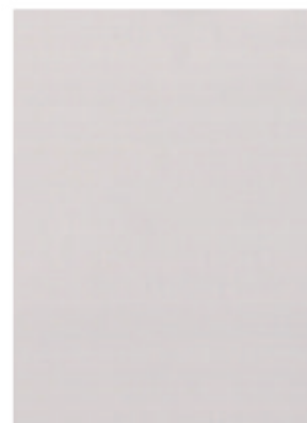

GSQ - 6280 (100g)



高附着力 / High adhesion

高湿度环境中能保持长期稳定

Maintain long-term stability in high humidity environments



绿色环保 / Environment protection

低VOC (挥发性有机化合物) 配方

Low VOC (volatile organic compound) formula



耐高温性 / Heat resistance


涂层能够承受较高的温度

Withstand high temperatures


Yellow series / 橘黄系列




GSQ - 6270 (10g)

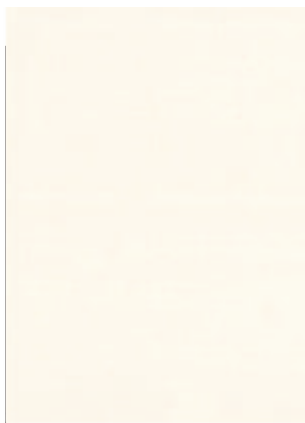

GSQ - 6270 (30g)

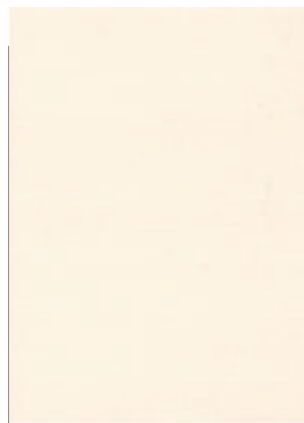

GSQ - 6270 (50g)

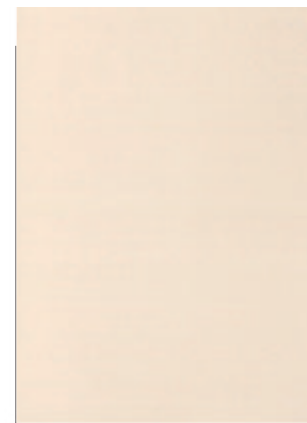

GSQ - 6270 (100g)


Concubine red / 妃红系列




GSQ - 6255 (30g)



GSQ - 6255 (50g)

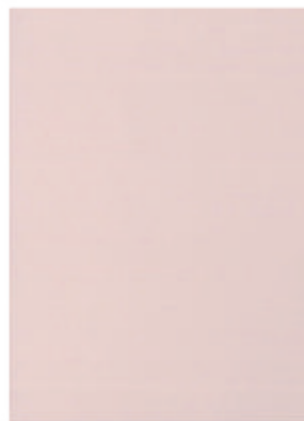

GSQ - 6255 (100g)

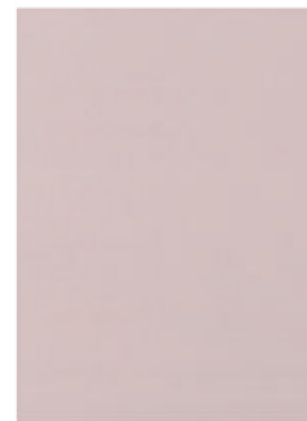


GSQ - 6255 (200g)


cocoa custard color / 可可蛋奶系列




GSQ - 6276 (10g)

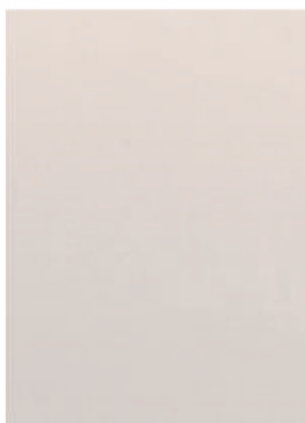

GSQ - 6276 (30g)

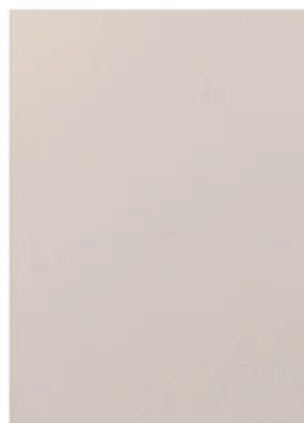

GSQ - 6276 (50g)

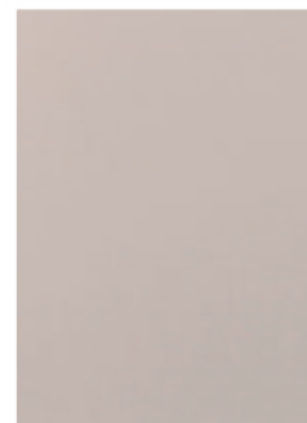

GSQ - 6276 (100g)



优异的耐水性 / Water resistance

适合浴室、厨房等潮湿环境

Suitable for environments such as bathrooms and kitchens



快速固化 / Rapid curing

涂层可以在1h内固化

Cure within 1 hour




超强耐磨 / Super wear-resistant


更强的耐磨性和长期色彩保持力

Stronger wear resistance and long-term color retention


spacewalk series
— 太空漫步系列

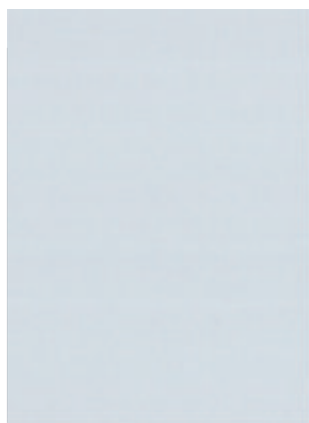


GSQ - 6281 (10g)

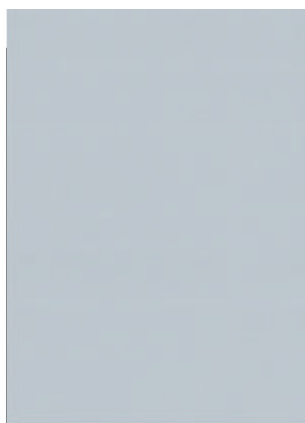

GSQ - 6281 (30g)

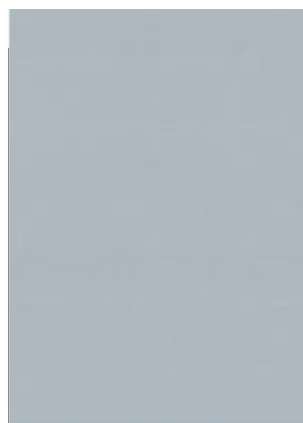


GSQ - 6281 (50g)

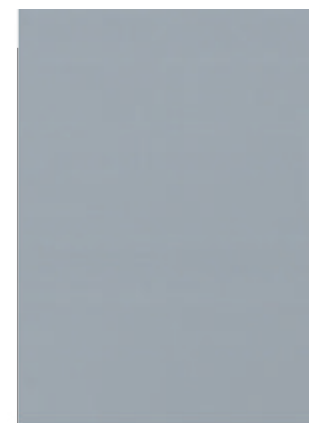

GSQ - 6281 (100g)


Indigo series
— 靛青系列

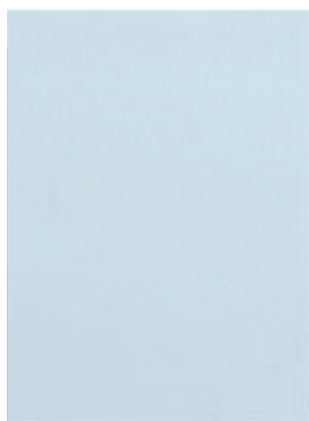

GSQ - 6268 (30g)



GSQ - 6268 (50g)

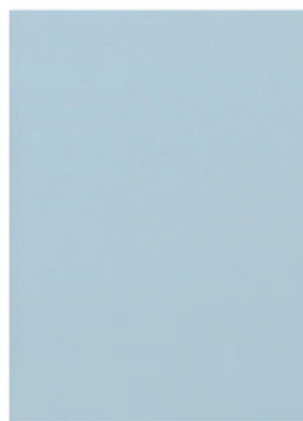


GSQ - 6268 (100g)



GSQ - 6268 (200g)

Green Series
— 青楸系列

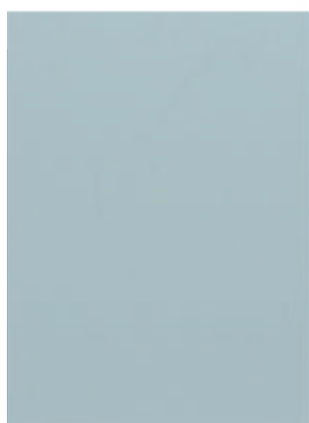

GSQ - 6231 (10g)



GSQ - 6231 (30g)




GSQ - 6231 (50g)




GSQ - 6231 (100g)


sky blue
/ 天青色系列

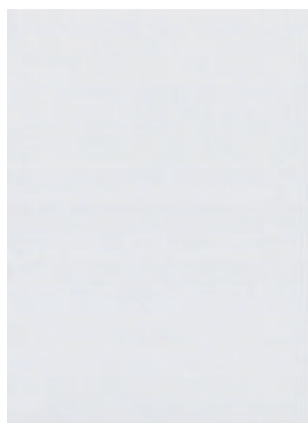


GSQ - 6261 (30g)

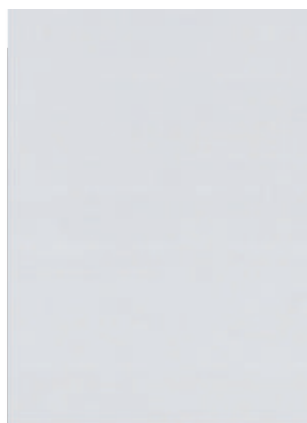

GSQ - 6261 (50g)

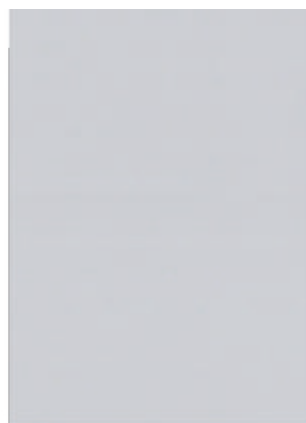


GSQ - 6261 (100g)

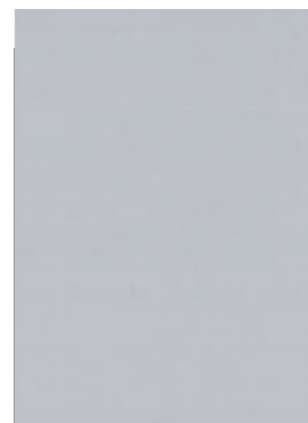


GSQ - 6261 (200g)


ink gray
/ 墨灰系列

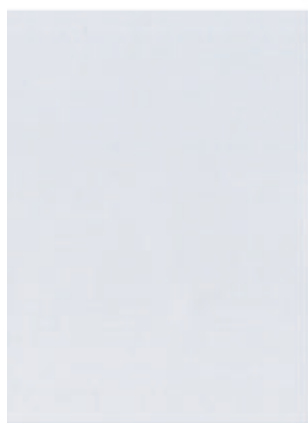


GSQ - M83 (10g)

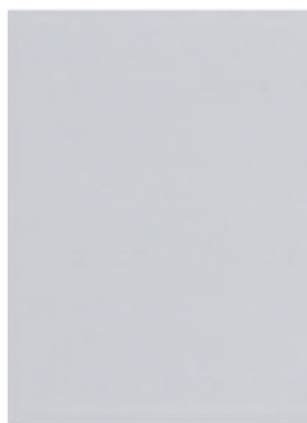

GSQ - M83 (30g)

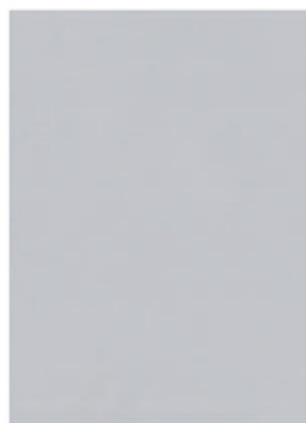


GSQ - M83 (50g)

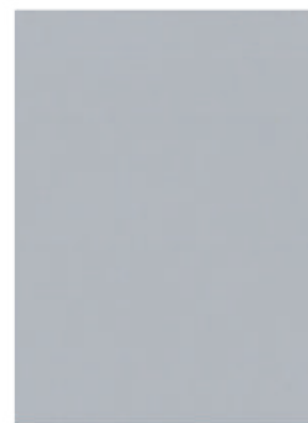

GSQ - M83 (100g)


grayish-blue
/ 灰青系列

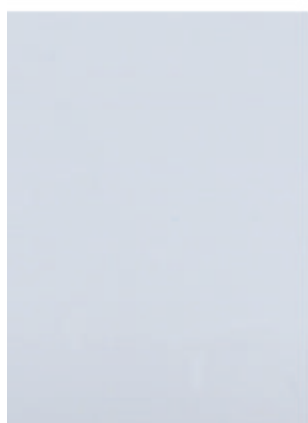


GSQ - 6242 (30g)



GSQ - 6242 (50g)

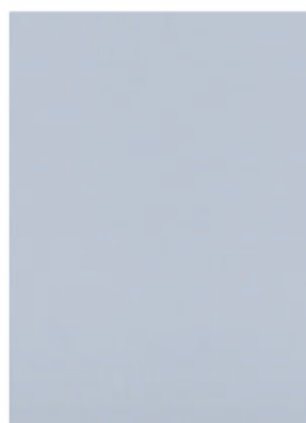

GSQ - 6242 (100g)

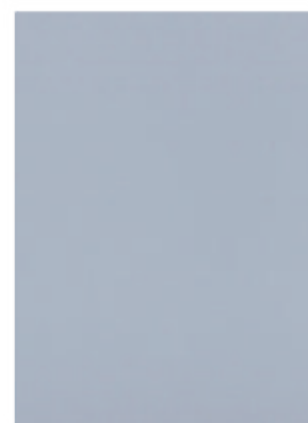

GSQ - 6242 (200g)

“魔力改色漆” Magical Color

特别说明

特别推荐用于室内空间的翻新（瓷砖），以及同时具备于应用在陶瓷改色、瓷砖改色、玻璃改色、木材改色、金属改色、JRC 高分子树脂、地胶、水泥&环氧地坪、石材水磨石改色、铝扣板改色、金刚石地面等表面的改色系统

/ Special Note

Specially recommended for indoor space renovation (ceramic tiles), as well as for simultaneous application in Ceramic color change, tile color change, glass color change, wood color change, metal color change, JRC polymer resin, floor adhesive, cement&epoxy flooring
Surface color modification systems for stone terrazzo, aluminum buckle plate, diamond flooring, etc

光泽选择

哑光、亮光、半光等可选
依据国际乳胶漆分类标准与光泽划分等级，
具备可以调整的光泽度，本品出厂默认为半光状态

/ Gloss selection

Matte, glossy, semi glossy, and other options are available
According to the international latex paint classification standards and gloss classification levels,
this product has adjustable glossiness,
This product is set to semi-gloss by default when it leaves the factory

参考用量 / Recommended dosage

4 - 5 m²/kg (2遍/Time)

因实际施工表面的粗糙程度和稀释比例不同
耗漆量也有所不同

Due to differences in the roughness and dilution ratio of the actual construction surface,
the amount of consumables also varies






羊毛辊筒
Wool roller



羊毛刷
Wool brush



调色搅拌器
Color mixer



直接均匀喷涂 / 辊涂两遍主材
按重涂时间计算

Directly and evenly spray/roll coat the main material twice calculated based on the recoating time

重涂时间 (按25-30°C 计算)



间隔2小时
重涂




8小时
完全干透

drying time (Calculated at 25-30 °C)



Interval of 2 hours
repaint



8 hours
completely dry



特别注意

A 组分和B 组分的标准混合比例为

100:2 出厂配置为5kg:0.1kg

A 和B 混合后的有效使用时间为12小时

/ Special attention

The standard mixing ratio of component A and component B is 100:2

100:2 factory configuration is 5kg: 0.1kg

The effective usage time after mixing A and B is 12 hours

使用前应搅拌均匀

为达到最佳涂刷效果, 滚涂、刷涂时可根据实际情况使用不高于15%(体积比)的清水稀释若使用无气喷涂, 在施工某些深色或艳色产品建议不要稀释, 必要时可按需要增加涂刷遍数

/ Stir evenly before use

To achieve the best painting effect, when using rolling or brushing, you can dilute with no more than 15% (by volume) of clean water according to the actual situation. If using airless spraying, it is recommended not to dilute when applying certain dark or bright-colored products. If necessary, increase the number of painting passes as needed

温馨提示

至少让Magical color paint 的第一层干燥8小时, 然后开始涂第二层和最后一层油漆
关于固化, 必须强调的是, 最后的期限将取决于每个空间的环境条件, 我们建议在使用前至少等待7天, 以便达到最佳性能

/ Kind Reminder

Allow the first layer of Magical color paint to dry for at least 8 hours before applying the second and final layers of paint.
Regarding solidification, it must be emphasized that the final deadline will depend on the environmental conditions of each space. However, we recommend waiting at least 7 days before use to achieve maximum performance.



魔力改色漆 Magical color paint (water based)

魔力改色漆，主要应用于瓷砖表面（非吸收性，完全防水的表面），内外墙均可
小蓝桶（魔力改色漆），是一款直接使用的瓷砖翻新专用改色材料。是一种高性能水性瓷砖涂料，轻松翻新室内空间
非常适合用于瓷质墙砖，如粗陶、瓷砖、花岗岩等
由于其水基配方，这是一种具有良好抗流水性能的油漆。因此，它非常适合用于浴室和厨房等房间

Magical color paint, primarily applied to tile surfaces (non-absorbent, fully waterproof surfaces), suitable for both interior and exterior walls
Magical Color Paint is a direct-use color-changing material specifically designed for tile renovation.
It is a high-performance water-based tile coating that effortlessly refreshes indoor spaces
It is highly suitable for porcelain wall tiles, such as rough pottery, ceramic tiles, granite, etc
Due to its water-based formula, this paint boasts excellent water resistance. Hence, it is highly suitable for use in rooms like bathrooms and kitchens

主要成分	高性能丙烯酸乳液、煅烧型高岭土、二氧化钛、纤维素、纯净水		
兑水比率	最高不超过20%的兑水率	产品净重	主材5kg/桶 + 促进剂:0.1kg/罐
色系选择	可参考万磊魔力改色漆 (Magical color paint) 色卡	保质期	常温干燥状态下24个月 (原装出厂时)
Ingredient	High-performance acrylic lotion, calcined kaolin, titanium dioxide, cellulose, purified water		
water ratio	Maximum 20% to water	Net Weight	Main material: 5kg/barrel + Accelerator: 0.1kg/can
Color Choice	See the Vanlei (Magical color paint) color swatch.	Shelf life	24 months in a dry state at room temperature

CN

基面要求

- ①建议选用优质耐水腻子粉作为找平材料
- ②基层应平整、干净，并具有较好的强度，方可施工
- ③旧墙翻新：铲平基层，清除松动的表层部分，清洁粉尘油污等杂质后方可施工

执行标准

GB 30981.1-2025《涂料中有害物质限量第1部分：建筑涂料》

注意事项

- 1、使用主材料之前，请充分搅拌均匀
- 2、请有效分隔、覆盖和遮蔽木质品与墙面的区域
- 3、气温低于10°C，相对湿度大于80%情况下不能施工
- 4、同型号不同批次产品会存在色差

技术支持

如需帮助，请咨询万磊公司 (0757-81760676)

EN

Substrate requirements

- ① Suggest using high-quality water-resistant putty powder as leveling material
- ② The base layer should be flat, clean, and have good strength before construction can proceed
- ③ Renovation of old walls: Flatten the base layer, remove loose surface parts, and clean dust, oil stains, and other impurities before construction can begin

Implementation standards: GB 30981.1-2025

Precautions


1. Before using the main material, please mix thoroughly and evenly
2. Please effectively separate, cover, and shield the area between wooden products and walls
3. Construction cannot be carried out when the temperature is below 10 °C and the relative humidity is above 80%
4. There may be color differences between products of the same model but different batches

Technical Support:

If you need assistance, please consult Vanlei Company (0757-81760676)

佛山市南海万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地（代码FS）

佛山市南海区狮山镇松岗万石管理区
象头岗万石村工业路1、2、5号

广州分公司

广州市荔湾区羊城装饰材料市场172号

广西生产基地（代码QT）

广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

⚠ 注意

公司根据产品技术和发展需要，有权对产品配方进行更新升级，而不对外另行公布，请以最新样板册颜色为准，不便之处，敬请原谅！

4000-147-187 www.fswanlei.com