

vanlei 万磊®




PRODUCT

云岭鎏珠  
Cloudy Metallic



YLLZ - 260301

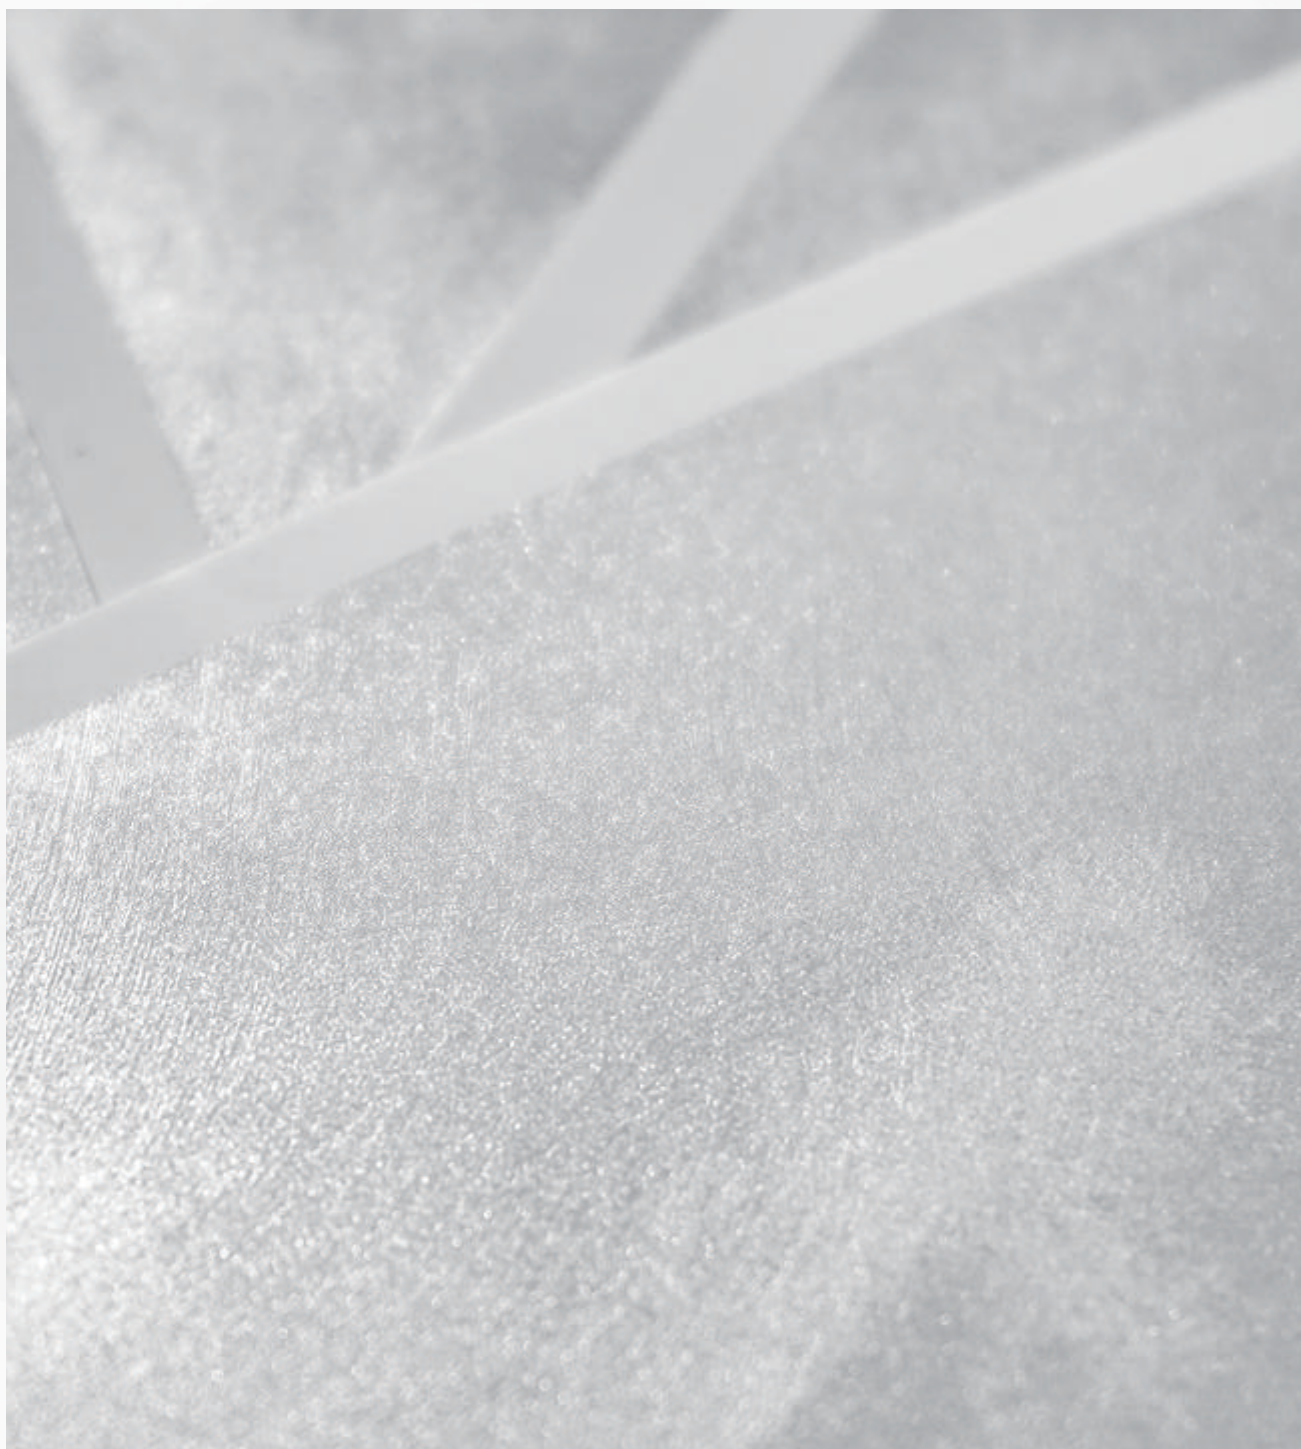

薄涂呈现天光质感  
高端艺术漆

Thin coating presents a sky light texture  
High end art paint

# Cloudy Metallic

高山 云岭  
流光溢彩的珠光漆

“云岭”是对天空云层的窥探是建筑与自然的深情共鸣  
“鎏珠”是表面的光影诗意是夜色里闪烁的梦境

灵感源自云层掠过山岭时的柔和光泽

Cloudy "is a glimpse into the clouds in the sky and a deep resonance between architecture and nature;  
Metallic "is the poetic expression of light and shadow on the surface  
It's a flickering dream in the night,

inspired by the soft luster of clouds passing over mountains

通过珠光体系与细腻涂层结合  
让墙面在自然光与灯光下呈现轻柔闪亮效果  
宛如云幕流光，清透而高级

By combining the pearl system with delicate coatings, the wall presents a soft and shiny effect under natural light and lighting, like a flowing cloud curtain, clear and high-end

# Carrying nature

为空间带来高质感的珠光效果 /



Large area seamless painting  
Minor color difference

可大面积涂刷无缝、细微的色差

Scratch resistance performance  
Bending resistance

持续的抗刮性能与耐弯折工法

Appearance and texture  
Clear texture and smooth touch

外观和质地纹理清晰明亮，触感光滑

这是一种回归本源的命名  
更是一款承载自然印记的涂层

云岭鎏珠, 取意于云端天岭之光  
是以薄涂承载天象的艺术漆

选择“云岭鎏珠”

为空间带来高质感的珠光效果  
让墙面在简洁之上拥有恰到好处的精致亮度  
打造轻盈、明亮、具有设计感的生活氛围

This is a naming that returns to its origin,  
and more importantly, a coating that  
carries natural imprints  
Cloudy Metallic, meaning the light of the  
sky ridge in the clouds, is an artistic  
lacquer that carries celestial phenomena  
with a thin coating

Choose 'Cloudy Metallic' to bring  
high-quality pearl effect to the space


Let the wall have just the right amount of  
exquisite brightness on top of simplicity,  
creating a light, bright, and well-designed  
living atmosphere

### ! 注意事项 /

YLD: 云岭鎏珠主材 (10kg)  
YLZ: 云岭鎏珠面1 (5kg)  
面2: 金属色/银色罩面 (0色浆) (2.5kg)

该色块中标注的标准色号  
为YLZ (面1) 的色浆配比含量  
其在主材 (YLD基料) 中的添加量x2  
**擦色面漆 (面2) 不可加入色浆**

Vanlei一共提供5种擦色方案  
分为金属色与银色罩面  
本版面通用为**银色罩面**

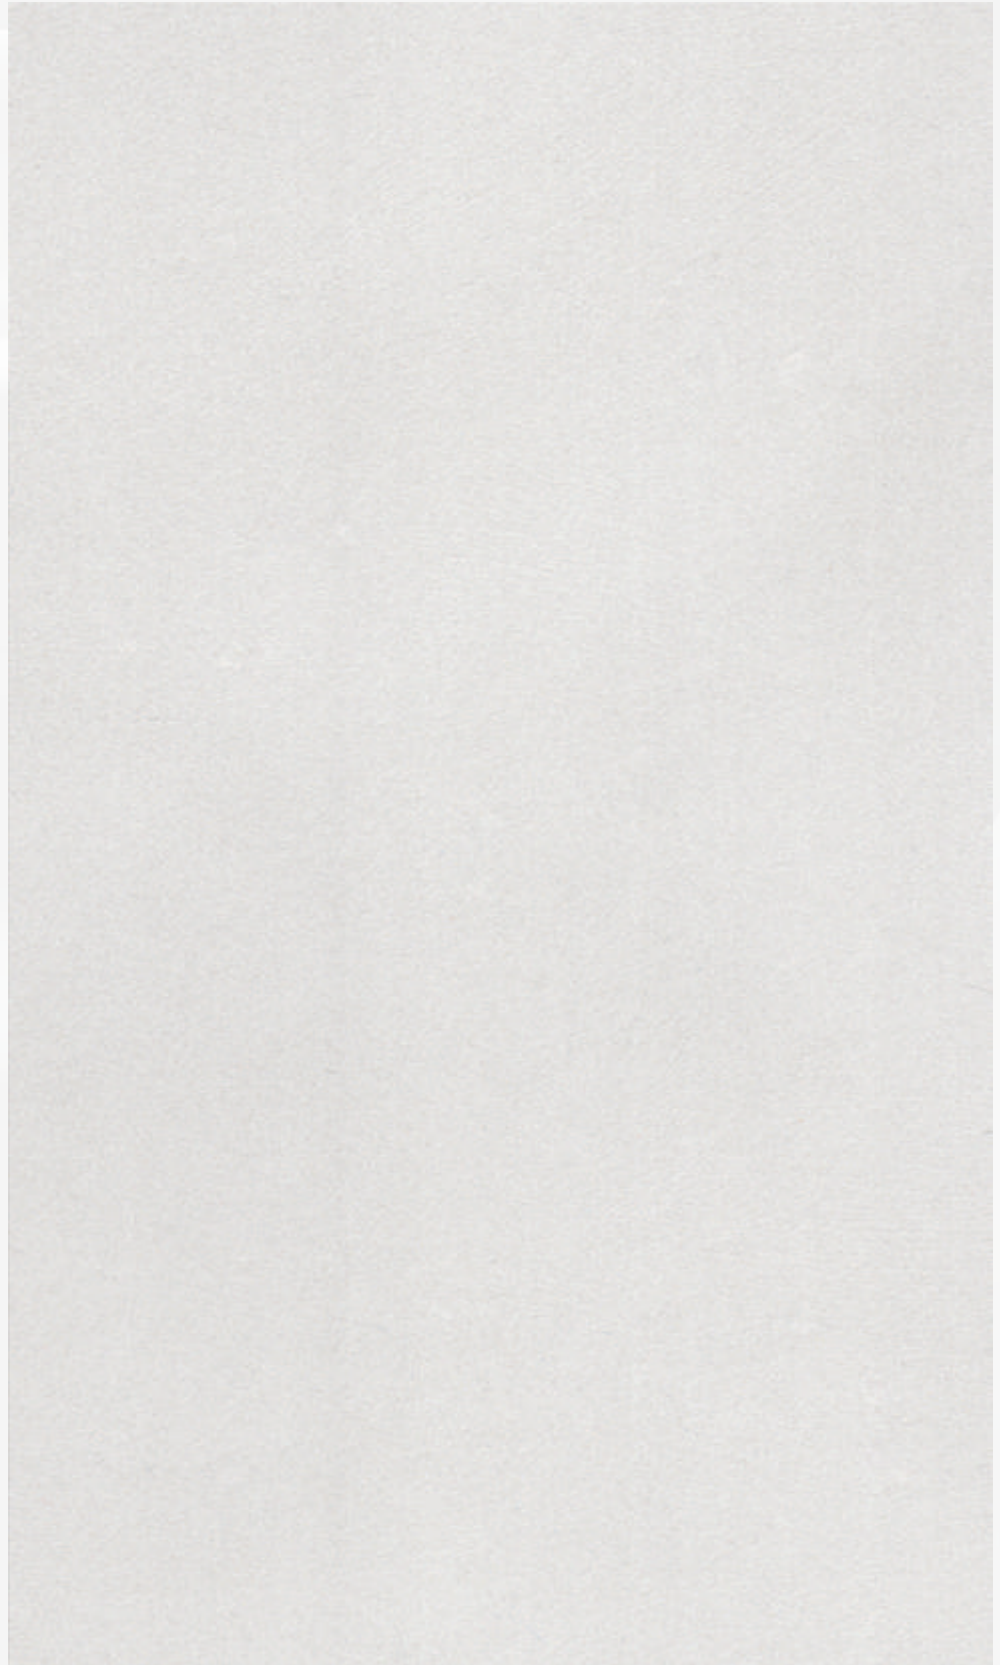

# Multiple styles

多种风格 它可以做出复古和欧式风格



Cloudy Metallic 由100%的丙烯酸乳液, 混合珠光粉末制成  
它具有柔软、丝滑的表面, 珠光光泽, Cloudy Metallic 可用于  
大面积区域替代油漆, 或用于装饰区域

Cloudy Metallic is made of 100% acrylic lotion mixed with pearlescent powder  
It has a soft, silky surface and a pearlescent luster. Cloudy Metallic can be used for  
large areas, as a substitute for paint, or for decorative areas

❗ 注意事项 /

YLD: 云岭漆珠主材 (10kg)  
 YLZ: 云岭漆珠面1 (5kg)  
 面2: 金属色/银色罩面 (0色浆) (2.5kg)

该色块中标准色号  
 为YLZ (面1) 的色浆配比含量  
 其在主材 (YLD基料) 中的添加量x2  
**擦色面漆(面2) 不可加入色浆**

Vanlei一共提供5种擦色方案  
 分为金属色与银色罩面  
 本版面通用为**银色罩面**



苏芳 YLZ - 006(10g)



苏芳 YLZ - 006(20g)



苏芳 YLZ - 006(50g)



可可蛋奶 YLZ - 063(10g)



可可蛋奶 YLZ - 063(20g)



可可蛋奶 YLZ - 063(50g)



落栗 YLZ - 004(10g)



落栗 YLZ - 004(20g)



落栗 YLZ - 004(50g)



薄柿 YLZ - 061(10g)



薄柿 YLZ - 061(20g)



薄柿 YLZ - 061(50g)



多种风格  
 它可以做出复古和欧式风格  
 multiple styles  
 Create a retro and European style



易于维护  
 防水功能和防霉设计  
 easy to maintain  
 Waterproof function and  
 anti mold design

# Cloudy



緬色

YLZ - 002(10g)



緬色

YLZ - 002(20g)



緬色

YLZ - 002(50g)



汝窑

YLZ - 064(10g)



汝窑

YLZ - 064(20g)



汝窑

YLZ - 064(50g)



龙膏烛

YLZ - 042(10g)



龙膏烛

YLZ - 042(20g)



龙膏烛

YLZ - 042(50g)



## Eco - friendly formulation design /

Vanlei adheres to the consistent style of "high quality". Vanlei Cloudy Metallic manufactures the most exquisite healthy, environmentally friendly, and non-toxic wall finishes, which do not release gases (zero VOC) and have low allergenicity.

Our products not only have unlimited versatility in appearance and feel, but they are also durable and suitable for both modern and traditional designs.

# Metallic

## 环保配方设计 /

万磊秉承一贯“高品质”的作风, Vanlei Cloudy Metallic 制造最精致的健康、环保、无毒的墙面饰面, 这些饰面不会释放气体 (零 VOC) 并且具有低过敏性

我们的产品不仅在外观、感觉方面具有无限的多功能性, 它们经久耐用, 而且适用于现代和传统设计

### ! 注意事项 /

YLD: 云岭臻珠主材 (10kg)  
 YLZ: 云岭臻珠面1 (5kg)  
 面2: 金属色/银色罩面 (0色浆) (2.5kg)

该色块中标注的标准色号为YLZ (面1) 的色浆配比含量  
 其在主材 (YLD基料) 中的添加量x2  
**擦色面漆 (面2) 不可加入色浆**

Vanlei一共提供5种擦色方案  
 分为金属色与银色罩面  
 本版面通用为**银色罩面**



黄白游

YLZ - 007(10g)



黄白游

YLZ - 007(20g)



黄白游

YLZ - 007(50g)



杏子灰

YLZ - 065(10g)



杏子灰

YLZ - 065(20g)



杏子灰

YLZ - 065(50g)



松花

YLZ - 005(10g)



松花

YLZ - 005(20g)



松花

YLZ - 005(50g)

# Physical properties

根据万磊实验室数据与观测 /

## CN.

云岭鑲珠具有高强度的柔韧性与耐弯折。实际应用效果时可以巧妙地应用于弧面墙体

另外,它坚固耐磨抗划,具备较高的硬度,日常的摩擦、刮蹭不易在其表面留下痕迹,即使在人流量较大的公共区域,也能长期保持表面的完整性和美观度

## EN.

According to data and observations from Vanlei Laboratory

Cloudy Metallic has high strength, flexibility, and bending resistance. In practical application, it can be cleverly applied to curved walls.

In addition, it is sturdy, wear-resistant, and scratch resistant, with high hardness. Daily friction and scratching are not easy to leave marks on its surface, and even in public areas with high pedestrian traffic, it can maintain the integrity and aesthetics of the surface for a long time.

## ! 注意事项 /

YLD: 云岭鑲珠主材 (10kg)  
YLZ: 云岭鑲珠面1 (5kg)  
面2: 金属色/银色罩面 (0色浆) (2.5kg)

该色块中标注的标准色号为YLZ (面1) 的色浆配比含量  
其在主材 (YLD基料) 中的添加量x2  
**擦色面漆 (面2) 不可加入色浆**

Vanlei一共提供5种擦色方案  
分为金属色与银色罩面  
本版面通用为**银色罩面**





持续的抗刮性能  
与耐弯折工法

Scratch resistance performance  
Bending resistance



太空漫步 YLZ - 066(10g)



太空漫步 YLZ - 066(20g)



太空漫步 YLZ - 066(50g)



茶白 YLZ - 015(10g)



茶白 YLZ - 015(20g)



茶白 YLZ - 015(50g)



外观和质地  
纹理清晰明亮, 触感光滑

Appearance and texture  
Clear texture and smooth touch



珍珠 YLZ - 045(10g)



珍珠 YLZ - 045(20g)



珍珠 YLZ - 045(50g)



绿色环保  
趋零VOC, 低VOC配方

Towards zero VOC,  
low VOC formula



伦敦雾 YLZ - 067(10g)



伦敦雾 YLZ - 067(20g)



伦敦雾 YLZ - 067(50g)



可大面积涂刷  
无缝、细微的色差

Large area seamless painting  
Minor color difference

# Heavy Metal Series

重金属系列 /



重金属系列

YLZ - 8131 - 白金



重金属系列

YLZ - 8131 - 黄金

## 修补与色差 /

本品修复时,基本可做到色差较小

## Repair and color difference /

When repairing this product, it can basically achieve a small color difference

① 注意事项 /

该色块中标注的标准色号, 为YLZ (面1) 的色浆配比含量  
其在主材 (YLD基料) 中的添加量x2

**擦色面漆(面2) 不可加入色浆**

Vanlei一共提供5种擦色方案,  
分为金属色与银色罩面, 本版面通用为**金属色罩面**



重金属系列

YLZ - 8131 - 青金



重金属系列

YLZ - 8131 - 红金

接口问题 /

超过1小时的差异施工, 会存在明显的阴阳面,  
建议一次性完成连续性的一面墙, 并在阴角位置收口

Interface issues/

Construction with a difference of more than 1 hour will result in obvious positive and negative surfaces.  
It is recommended to complete one continuous wall at a time and close at the negative corner position

# 云岭 / Cloudy 漆珠 / Metallic

## 技术参数 Technical data

材料性能	material properties	主材 / 面1 / 金属色/银色罩面 / 保护面漆:无溶剂(水基)			
干膜厚度	dry film thickness	主材:0.2-0.25mm	面1:0.05-0.08mm	金属色/银色罩面:0.04-0.06mm	保护面漆:0.02-0.04mm
理论覆盖率	Theoretical coverage	主材:3-3.5m <sup>2</sup> /kg	面1:6-8m <sup>2</sup> /kg	金属色/银色罩面:10-15m <sup>2</sup> /kg	保护面漆:10-15m <sup>2</sup> /kg
干燥时间(表干)	Drying time (touch dry)	主材 / 面1 / 金属色/银色罩面 / 保护面漆:2h(25-27°C)			
触干时间	Touch dry time	主材:8h(25-27°C)	面1:4h(25-27°C)	金属色/银色罩面:4h(25-27°C)	保护面漆:4h(25-27°C)
干燥时间(硬)	Drying time (hard)	主材 / 面1 / 金属色/银色罩面 / 保护面漆:24h(25-27°C)			
涂层	coating	主材:2次	面1:2次	金属色/银色罩面:3次	保护面漆:2次
使用寿命	service life	主材 / 面1 / 金属色/银色罩面 / 保护面漆:20年			
油漆颜色	paint color	多色选择			
贮存	storage	主材 / 面1 / 金属色/银色罩面 / 保护面漆:30°C, 凉爽, 干燥			

## 基面要求 Base requirements

- ① 必须使用耐水腻子粉, 表面平整无脱落或掉粉现象      ② (轻微) 掉粉时: 辊涂万磊渗透底漆一遍, 12小时后再施工

**石膏板 (仅限室内):** 涂抹 Cloudy Metallic 前, 应先对表面进行检查, 并注意打磨平整, 仅使用矿物底漆或推荐的乳胶或丙烯酸底漆

**现有的油漆基材:** 只要是乳胶或丙烯酸 (水性), Vanlei Cloudy Metallic 就能粘附在先前存在的涂漆表面上。我们建议在涂抹石膏之前先打磨表面以获得更好的粘性, 并擦去灰尘。如有必要, 在涂抹 Cloudy Metallic 之前使用万磊金装透明底漆或推荐的乳胶或丙烯酸底漆

**现存纹理的墙面:** Cloudy Metallic 可应用于现有的中等纹理, 如橘皮或轻型跳跃抹刀。涂上第一层以覆盖纹理。厚度过大可能会出现轻微开裂, 只要没有分层或剥落, 这是可以接受的

- ① Waterproof putty powder must be used, with a smooth surface and no peeling or powder falling off phenomenon.  
② (Mild) When powder falls off, apply Wanlei penetrating primer once by roller and wait for 12 hours before construction


Gypsum board (indoor only): Before applying Cloudy Metallic, the surface should be inspected and polished flat, using only mineral primer or recommended latex or acrylic primer  
Existing paint substrates: As long as they are latex or acrylic (water-based), Vanlei Cloudy Metallic can adhere to previously existing paint surfaces. We suggest polishing the surface for better adhesion and wiping off dust before applying gypsum. If necessary, use Wanlei Gold transparent primer or recommended latex or acrylic primer before applying Cloudy Metallic  
Existing textured walls: Cloudy Metallic can be applied to existing medium textures such as orange peel or lightweight jumping spatula. Apply the first layer to cover the texture. Excessive thickness may result in slight cracking, as long as there is no delamination or peeling, which is acceptable



01

找平基面, 施工金装透明封闭底漆

Level the base surface and apply Vanlei gold transparent sealing primer



04

擦色面1 (稀释:40-50%) 施工, 擦色海绵均匀打圈擦涂2次, 干透后用1000目砂纸打磨, 以减少打磨痕迹, 增加表面平整度

Brush surface 1 (dilution: 40-50%) for construction, evenly apply the sponge in circles twice, dry thoroughly, and use 1000 grit sandpaper to polish to reduce polishing marks and increase surface flatness



02

均匀搅拌主材 (稀释:3-5%)  
平批一次主材, 2h干透后320目砂纸打磨掉批刀痕

Mix the main material evenly (dilution: 3-5%)  
Batch the main material once, and after 2 hours of drying, polish off the batch knife marks with 320 grit sandpaper



05

擦色面2 (稀释:100%)  
施工, 擦涂3次

Rubbing surface 2 (dilution: 100%)  
construction, wipe 3 times



03

平批第二道主材 (1mm厚度以内),  
干透后用320目打磨平整, 去尘

Batch the second main material (within 1mm thickness),  
After drying thoroughly, use 320 grit polishing to smooth and remove dust



06

金装面漆施工, 加水20-25%稀释后  
用擦色海绵均匀打圈擦涂上墙

Construction of golden topcoat, diluted with 20-25% water  
Use a color sponge to evenly circle and apply it to the wall



大面积施工注意: 可用短毛辊筒, 辊涂后用海绵打圈均匀擦涂

Attention for large-scale construction: Short haired rollers can be used, and after roller coating, sponge should be used to evenly apply in circles

参考用量 Coating Rate

云岭鎏珠 (主材) (平批/收光)  
Cloudy Metallic (flat batch/finishing)

2.5 - 3

m<sup>2</sup>/kg (2遍/Time)

产品配套 Product matching




- 1 云岭鎏珠 (艺术漆) 主材: (10kg): 本色浆添加量为面1色浆\*2的数值
- 2 云岭鎏珠 (艺术漆) 面1 (5kg): 50g标准色浆或参照具体型号
- 3 云岭鎏珠 (艺术漆) 面2 (银白色/金属色) (2.5kg), 本品不须另加色浆
- 4 万磊金装内墙保护面漆 (5kg)



Main material: (10kg): The addition amount is the value of 2 times the color paste for 1 color of the surface  
For Side 1 (5kg): 50g standard color paste or refer to specific model  
Sheet 2 (silver/metallic) (2.5kg), no additional colorant required for this product  
Vanlei Gold-Coated Interior Wall Protective Topcoat (5kg)



万磊公众号



小程序



施工教程

CN.

EN.

**产品概述 /** 云岭鎏珠 (Cloudy Metallic), 是一款以“薄涂呈现天光质感”的高端艺术漆。“云岭”是对天空云层的窥探, 是建筑与自然的深情共鸣; “鎏珠”是表面的光影诗意, 是夜色里闪烁的梦境。灵感源自云层掠过山岭时的柔和光泽, 通过珠光体系与细腻涂层结合, 让墙面在自然光与灯光下呈现轻柔闪亮效果, 宛如云幕流光, 清透而高级

**主要成分 /** 纳米级丙烯酸乳液、纳米碳酸钙粉、纯净水、珠光粉、二氧化钛

**产品特点 /**

- A. 外观和质地-纹理清晰明亮, 触感光滑
- B. 多种风格-它可以做出复古和欧式风格
- C. 易于维护-防水功能和防霉设计
- D. 趋零VOC, 低VOC配方
- E. 可大面积涂刷: 无缝、细微的色差
- F. 持续的抗刮性能与耐弯折工法
- G. 大宅优选效果与肌理, 持续的金属光泽饰面

**适用范围 /** 室内墙面装饰使用, 尤其大面积使用。不可用于室外

**配套工具 /** 不锈钢批刀、羊毛辊筒、擦色海绵, 320-1000目砂纸

**保质期 /** 常温干燥状态下18个月(原装出厂时), 加水混合主材后必然影响保质期

**执行标准 /** GB 30981.1-2025《涂料中有害物质限量第1部分: 建筑涂料》

**注意事项 /**

1. 使用前阅读施工说明, 以获得可靠和满意的涂装效果
2. 请有效分隔、覆盖和遮蔽木质品与墙面的区域
3. 气温低于10°C, 相对湿度大于80%情况下不能施工
4. 同型号不同批次产品会存在色差
5. 加水后隔天施工会存在沉淀情况, 搅拌后施工即可

**干燥时间 /** 基于室温25°C, 湿度<50%



2小时  
触干



6-8小时后  
涂层之间重复施工

**Overview /** Cloudy Metallic. It is a high-end art paint that presents a sky light texture through thin coating. Cloudy "is a glimpse into the clouds in the sky and a deep resonance between architecture and nature; Metallic" is a poetic expression of light and shadow on the surface, a sparkling dream in the night. The inspiration comes from the soft luster of clouds passing over mountains. Through the combination of pearl system and delicate coating, the wall presents a soft and shiny effect under natural light and lighting, like a flowing cloud curtain, clear and high-end

**Ingredients /** Nano acrylic lotion, nano calcium carbonate powder, purified water, pearlescent powder, titanium dioxide

**Feature /**

- A. Appearance and texture - Clear and bright texture, smooth touch
- B. Multiple styles - it can create retro and European styles
- C. Easy to maintain - waterproof function and anti mold design
- D. Towards zero VOC, low VOC formula
- E. Can be applied over a large area: seamless, with slight color differences
- F. Continuous scratch resistance and bending resistance
- G. Preferred effect and texture for mansion, with a continuous metallic luster finish

**Scope of Application /** Indoor wall decoration, especially for large-scale use. Not suitable for outdoor use

**Tools /** Stainless steel batch knife, wool roller, color sponge, 320-1000 grit sandpaper

**Shelf life /** At room temperature and in a dry state for 18 months (original factory), mixing the main materials with water will inevitably affect the shelf life

**Standard /** GB 30981.1-2025

**Precautions /**

1. Read the construction instructions of the packaging before use to obtain a reliable and satisfactory coating effect
2. Please effectively separate, cover, and shield the area between wooden products and walls
3. Construction cannot be carried out when the temperature is below 10 °C and the relative humidity is above 80%
4. There may be color differences between products of the same model but different batches
5. After adding water, there may be sedimentation during construction the next day. Construction can be carried out after mixing

**drying time /** Based on room temperature of 25 °C and humidity<50%



2 hours  
Touch dry



After 6-8 hours  
Repeat between coats

## 佛山市南海万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



### 广东生产基地 (代码FS)

佛山市南海区狮山镇松岗万石管理区  
象头岗万石村工业路1、2、5号

### 广州分公司

广州市荔湾区羊城装饰材料市场172号

### 广西生产基地 (代码QT)

广西壮族自治区贵港市覃塘区产业园甘化园区

### 南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

### △ 注意

公司根据产品技术和发展需要, 有权对产品配方进行更新升级, 而不对外另行公布, 请以最新样板颜色为准, 不便之处, 敬请原谅!

**4000-147-187** www.fswanlei.com