

vanlei 万磊®

róu

柔  
絨

róng

mù

暮  
帷

wéi

VEILAIR



絨感基底上營造出輕薄如紗的透明層次  
Transparent layers as light and delicate as gauze



城跡新語系列

City Series

# VEILAIR.

絨感基底上營造出輕薄如紗的透明層次



Color matching



## 現存紋理的牆面

柔絨 · 暮帷 Veilair由於比較輕薄最終飾面層在0.03-0.05mm厚度  
因此不可直接應用於現有的中等紋理, 如橘皮或輕型跳躍抹刀的表面上, 應該對基面重新施工以及評估

## The existing textured wall surface

Veilair, is relatively thin and lightweight, with a final finish layer thickness of 0.03-0.05mm.  
Therefore, it cannot be directly applied to existing medium textures, such as orange peel or surfaces treated with a light trowel.  
The base surface should be reworked and evaluated



01

輥塗兩遍底漆(沈漿白色抗碱砂底漆)  
兌水20-25%使用

Apply two coats of primer (Shenjiang white alkali-resistant sand primer) Use with 20-25% dilution



02

使用羊毛滾筒滾塗一遍(主材加水20-25%)  
未幹前用毛線拍不規律輕拍

Apply a coat using a wool roller (main material mixed with 20-25% water) Before drying, use a woolen cloth to gently pat it in an irregular manner



03

6h幹透後重塗一次

After drying for 6 hours, apply a new coat



04

最終完成效果

Final completion effect

! 根據產品的設計理念, Vanlei萬磊建議選用啞光面漆以增加產品的適配性  
Based on the design concept of the product, Vanlei recommends using a matte finish to enhance the adaptability of the product

配套體系 Supporting system



沈漿砂底漆



柔絨·暮帷 Veilair

施工工具 Construction tools



羊毛輥筒



毛線拍

參考用量 Coverage rate

柔絨·暮帷(主材)(平批/收光)  
Veilair (flat batch/finishing)

4 - 5 m<sup>2</sup>/kg (2遍/Times)

产品配套 Product matching



- ① Vanlei沈漿砂底漆: (5kg): 100g無機色漿
- ② 柔絨·暮帷Veilair主材: (5kg): 50g或色階

Vanlei sedimentation sand primer: (5kg): 100g inorganic color paste  
Veilair main material: (5kg): 50g or color grade



萬磊公眾號



小程序



施工視頻



「柔絨·暮帷」，絨質的柔和效果可以和都市中的光影交織相聯系  
其質感介於細膩絨布與朦朧紗簾之間

Veilair, with its velvety soft effect,  
can be associated with the interplay of light and  
shadow in the urban setting

Its texture falls somewhere between delicate  
velvet and hazy gauze

它通過特殊工藝  
在絨感基底上營造出輕薄如紗的透明層次  
如同為空間拉起一道暮光中的帷幔

It is produced through special craftsmanship  
Create a transparent layer as light and thin as gauze on a velvety base  
Like drawing a curtain in the twilight for space

它讓外界景致與光線柔化、虛化  
色彩飽和度降低  
呈現高級的灰調融合感  
觸感順滑輕柔  
實現視覺的朦朧美與觸覺的舒緩感統一  
完美定義黃昏時分家的靜謐氛圍

---

It softens and blurs the external  
scenery and light  
Reduce color saturation  
Exhibiting a sophisticated blend  
of gray tones

The touch feels smooth and gentle  
Unify the hazy beauty of vision with the  
soothing sensation of touch  
The perfect embodiment of the serene  
atmosphere of a home at dusk



2

城跡新語 - 系列  
City Traces - Series



我們的產品不僅在外觀、感覺方面具有無限的多功能性，它們經久耐用，而且適用於現代和傳統設計  
Our products not only possess infinite versatility in terms of appearance and feel, but they are also durable and suitable for both modern and traditional designs

# 柔絨·暮帷 / VEILAIR

在絨感基底上營造出輕薄如紗的透明層次, 如同為空間拉起一道暮光中的帷幔

The delicate and transparent layers, as light as gauze, form a curtain in the twilight

Veilair 由100%的丙烯酸乳液混合納米級的絨毛粉末製成


它具有柔軟、絲滑的表面, 啞光光澤

Veilair 可用於大面積區域, 替代油漆, 或用於裝飾區域

Veilair is made from a 100% acrylic lotion mixed with nano-sized fluff powder

It boasts a soft, silky surface with a matte finish

Veilair can be used for large areas, as a substitute for paint, or for decorative purposes

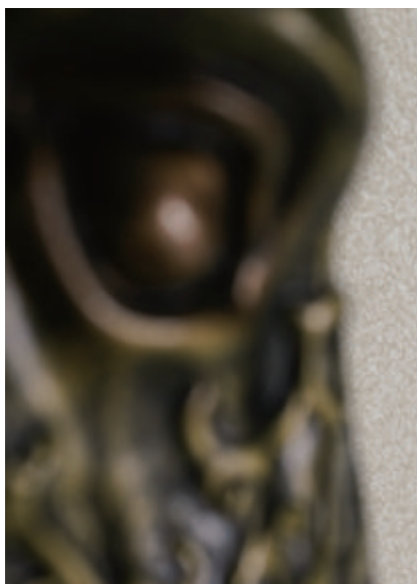

萬磊秉承一貫「高品質」的作風, Vanlei Veilair 製造最精致的健康、環保、無毒的牆面飾面  
這些飾面不會釋放氣體(零 VOC) 並且具有低過敏性

Vanlei Adhering to its consistent "high-quality" ethos, Vanlei Oxweave crafts the most exquisite wall finishes that are healthy, eco-friendly, and non-toxic  
These finishes do not emit gases (zero VOC) and are hypoallergenic



易於維護  
防霉、防菌設計

Easy to maintain  
Mildew-proof bacteria-proof design



可可蛋奶 RRM - 063(10g)



可可蛋奶 RRM - 063(20g)



可可蛋奶 RRM - 063(50g)



蛋白奶糖 RRM - 002(10g)



蛋白奶糖 RRM - 002(20g)



蛋白奶糖 RRM - 002(50g)



松灰 RRM - 005(10g)



松灰 RRM - 005(20g)



松灰 RRM - 005(50g)



銀雪草 RRM - 045(10g)



銀雪草 RRM - 045(20g)



銀雪草 RRM - 045(50g)



環保設計  
趨零VOC, 低VOC配方

Eco-design  
Near-zero VOC, low VOC formula

# 柔絨·暮帷 /

絨感基底上營造出輕薄如紗的透明層次



夏至 RRM - 018(10g)



夏至 RRM - 018(20g)



夏至 RRM - 018(50g)



湖濱之戀 RRM - 019(10g)



湖濱之戀 RRM - 019(20g)



湖濱之戀 RRM - 019(50g)



暮色灰 RRM - 050(10g)



暮色灰 RRM - 050(20g)



暮色灰 RRM - 050(50g)



倫敦霧 RRM - 067(10g)



倫敦霧 RRM - 067(20g)



倫敦霧 RRM - 067(50g)

## VEILAIR /

Continuous Extension

介乎絨布與紗簾之間 / 觸感柔滑



水藍灰 RRM - 042(10g)



水藍灰 RRM - 042(20g)



水藍灰 RRM - 042(50g)



復刻黃昏靜謐感 / 朦朧雅致



太空漫步 RRM - 066(10g)



太空漫步 RRM - 066(20g)



太空漫步 RRM - 066(50g)




牛津白 RRM - 015(10g)



牛津白 RRM - 015(20g)



牛津白 RRM - 015(50g)

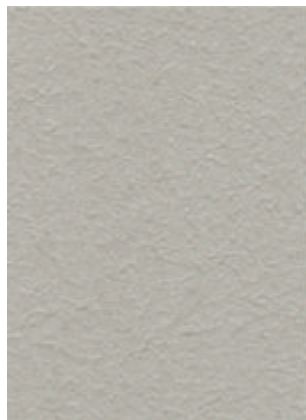

艾草 RRM - 048(10g)



艾草 RRM - 048(20g)




艾草 RRM - 048(50g)




可大面積塗刷  
無縫、細微的色差

Large area seamless painting  
Minor color difference

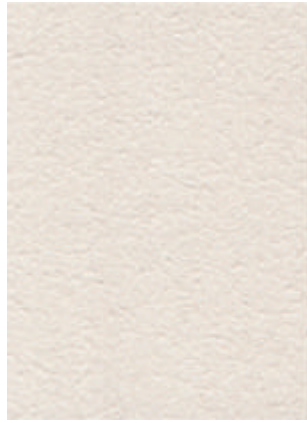

杏子灰 RRM - 065(10g)

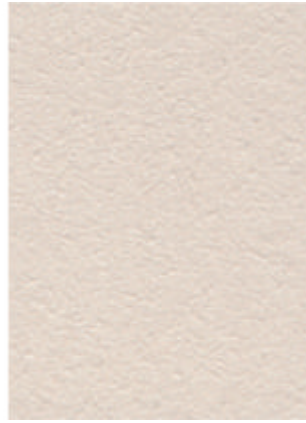

杏子灰 RRM - 065(20g)



杏子灰 RRM - 065(50g)



淺米色 RRM - 004(10g)



淺米色 RRM - 004(20g)




淺米色 RRM - 004(50g)




持續的抗刮性能  
超強抗裂耐候

multiple styles  
Create a retro and European style

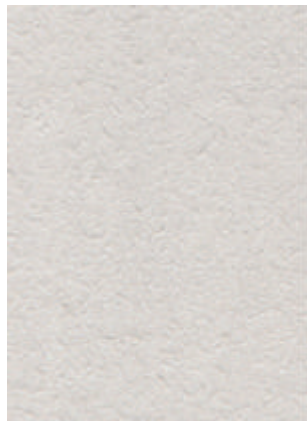

雪花石膏 RRM - 007(10g)

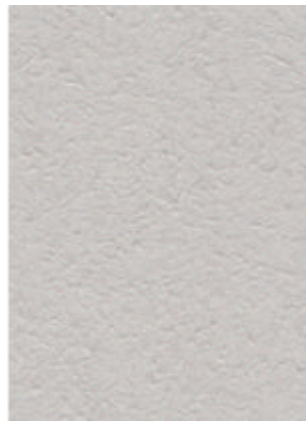

雪花石膏 RRM - 007(20g)



雪花石膏 RRM - 007(50g)



大宅優選效果與肌理  
持續的金屬光澤飾面

easy to maintain  
Waterproof function and  
anti mold design



輕舞飛揚 RRM - 061(10g)



輕舞飛揚 RRM - 061(20g)



輕舞飛揚 RRM - 061(50g)

# 柔絨·暮帷 / VEILAIR

「柔絨·暮帷」,這種絨質的柔和效果可以和都市中的光影交織相聯系,其質感介於細膩絨布與朦朧紗簾之間。它通過特殊工藝,在絨感基底上營造出輕薄如紗的透明層次,如同為空間拉起一道暮光中的帷幔。它讓外界景致與光線柔化、虛化,色彩飽和度降低,呈現高級的灰調融合感。觸感順滑輕柔,實現視覺的朦朧美與觸覺的舒緩感統一,完美定義黃昏時分家的靜謐氛圍。

主要成分	淨味丙烯酸乳液、水、納米級玻璃珠、納米級珠光粉、纖維素
適用範圍	室內, 牆面裝飾使用, 尤其大面積使用, <b>不可用於室外</b>
配套體系	沈漿砂底漆(5kg) + 柔絨·暮帷 Veilair 主材(5kg)
配套比例	沈漿砂底漆:(5kg): 100g 無機色漿      柔絨·暮帷 Veilair 主材:(5kg): 50g 或色階
配套工具	羊毛輓筒、毛線拍
基面要求	①新建牆面: 清除表面灰塵, 油膩和松散泥灰, 如果有孔隙和裂縫要修補, 牆面必須牢固、清潔乾燥平整 ②重塗牆面: 要鏟除掉鬆動不牢固的漆膜, 清除牆面灰塵和粉化的雜質, 批平打磨, 牆面必須牢固、清潔乾燥平整 ③預塗基材表面濕度小於 10%, PH 值小於 10 ④為確保最佳的牆面塗裝效果, 強烈建議搭配底漆使用 ⑤因主材層較薄, 在施工基底時盡可能的滾塗平滑, 以增加主材的平滑手感
參考用量	沈漿砂底漆: 4-5m <sup>2</sup> /kg/2遍      柔絨·暮帷 Veilair: 4-5m <sup>2</sup> /kg/2遍
加水比例	本品加入最高不超過材料的 30% 比例
施工方法	①輓塗兩遍底漆(沈漿白色抗碱砂底漆), 兌水 20-25% 使用 ②主材加水 20-25%, 用羊毛滾筒滾塗一遍, 厚度適中, 未幹前用毛線拍拍進行不規律輕拍塗出肌理 ③6h 幹透後重塗一次 根據產品的設計理念, Vanlei 萬磊推薦選用 <b>金裝啞光保護面漆</b> 以增加產品的適配性
保質期	常溫乾燥狀態下 24 個月(原裝出廠時), 加水混合主材後必然影響保質期
執行標準	GB 30981.1-2025 《塗料中有害物質限量第1部分: 建築塗料》
環保承諾	本產品不添加任何重金屬等有害物質, 不超出最新內牆裝飾材料有害物質限量的國家標準, 完全符合中國環境產品技術要求




包裝規格/Packaging: 5L



耗材標準/Coverage rate: 4-5m<sup>2</sup>/kg/2遍/2Times

## 佛山市南海萬磊建築塗料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



### 廣東生產基地(代碼FS)

佛山市南海區獅山鎮松崗萬石管理區  
象頭崗萬石村工業路1、2、5號

### 廣州分公司

廣州市荔灣區羊城裝飾材料市場172號

### 廣西生產基地(代碼QT)

廣西壯族自治區貴港市覃塘區產業園甘化園區

### 南寧分公司

廣西壯族自治區南寧市興寧區快環建材市場

### △ 注意

公司根據產品技術和發展需要, 有權對產品配方進行更新升級, 而不對外另行公布, 請以最新樣板冊顏色為準, 不便之處, 敬請原諒!

**4000-147-187**      www.fswanlei.com