

Thickness /
From Nature
Used for wall surfaces

100%
OMNISTONE

万象石

vanlei万磊®

天地万象

All phenomena of heaven and earth,
All in Omnistone.



尽在万象石。





Natural Stone Color

天然石料颜色, 无机色浆调色

选用色系：按万磊万象石(Omnistone)色卡选色
提供20种配色方案, 不同的基料应适配不同的色浆系统

色系划分：拥有3种形式的基料, 分为金栗, 墨隐, 清珀

Provide 20 color schemes, and different base materials should be adapted to different color paste systems

Color scheme classification:
There are three forms of base materials, including chestnut, ink

特征和物理特性	
净含量	25kg
固含量/比重	65% ±1
防火等级	A级, 不燃 / 不可燃
比重	1.47kg/L(±0.05)
干燥时间(以25℃, 湿度≤60计算)	表干：2h 重涂：24h
Ph值	10-11.5
稀释剂	清水, 加水比例2-3%
完成面厚度	2-3mm
内 / 外墙可用	

Characteristics and physical properties	
Net Content	25kg
Solid content/specific gravity	65% ±1
fire rating	A-class non combustible
specific gravity	1.47kg/L(±0.05)
Drying time (calculated at 25℃ and humidity ≤ 60)	Surface drying: 2 hours, recoating: 24 hours
PH value	10-11.5
thinner	Clear water, with a water ratio of 2-3%
Finished surface thickness	2-3mm
Interior / exterior Applied	



施工视频
Construction video



纯天然熟石灰制品, 天然无公害
Pure natural hydrated lime products
natural and pollution-free

vanlei万磊®




万象石 - 汉白

WXB - 白色



万象石 - 浅细

WXY - 黄色

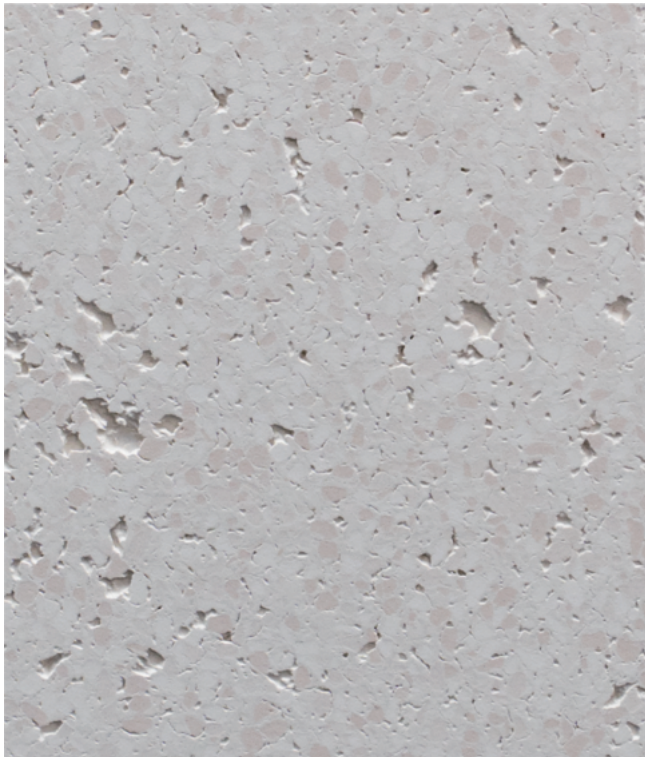

万象石 - 焰芯

WXR - 浅红



万象石 - 灰磐

WXK - 灰色

色卡颜色与实际材料颜色有少许差异为正常现象

It is normal for the color card color to differ slightly from the actual material color

100%
OMNISTONE
万象石



师法自然. 无任何有机合成物, 只取自然界现存的色系


Learn from nature. No organic compounds, Only take
the existing color schemes in nature

vanlei万磊®




万象石 - 浅细

WXY - M01(10g)

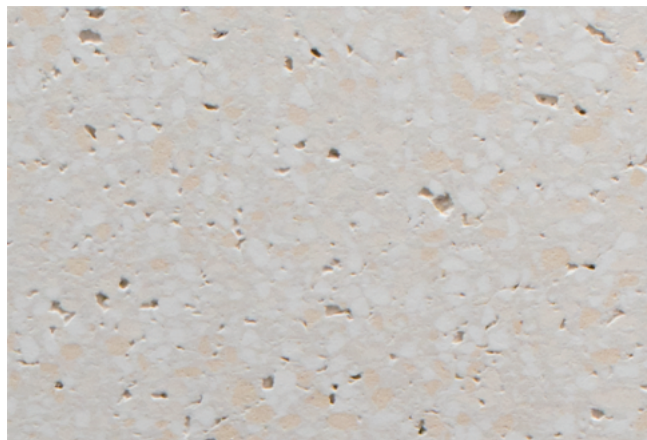

万象石 - 浅细

WXY - M15(10g)

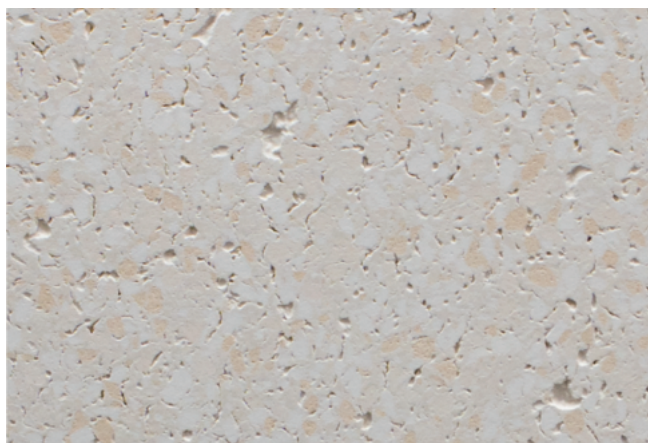

万象石 - 浅细

WXY - M12(10g)




万象石 - 浅细

WXY - 6276(10g)



万象石 - 浅细

WXY - M10(10g)

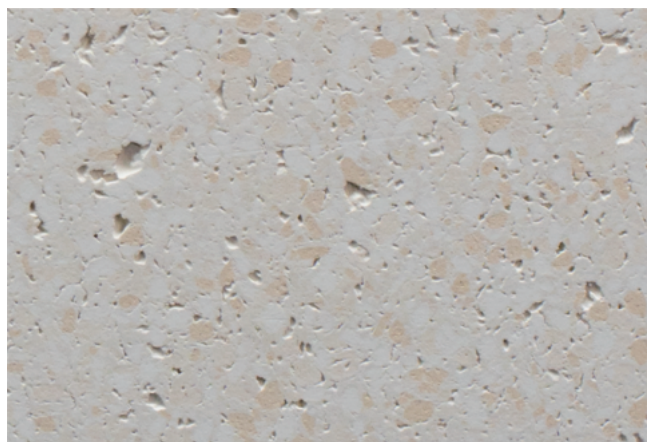

万象石 - 浅细

WXY - 6273(10g)

色卡颜色与实际材料颜色有少许差异为正常现象

It is normal for the color card color to differ slightly from the actual material color

100%
OMNISTONE
万象石



通体液态石材, 冰冷质感, 触感/自带滑面手感, 丰满的不像实力派

Whole body liquid stone, with a cold texture

Touch/Comes with a smooth texture, full and not like a powerhouse

vanlei万磊®



万象石 - 焰芯

WXR - M03(10g)



万象石 - 焰芯

WXR - M32(10g)



万象石 - 焰芯

WXR - 6274(10g)



万象石 - 焰芯

WXR - M38(10g)



万象石 - 焰芯

WXR - M31(10g)



万象石 - 焰芯

WXR - M50(10g)

色卡颜色与实际材料颜色有少许差异为正常现象

It is normal for the color card color to differ slightly from the actual material color

100%
OMNISTONE
万象石



可呈现大面积无缝石材效果, 视觉冲击力与功能环保都拉满

It can present a large-scale seamless stone effect

Visual impact and environmentally friendly functionality are fully enhanced

vanlei万磊®



万象石 - 灰磐

WXX - M29(10g)



万象石 - 灰磐

WXX - M08(10g)



万象石 - 灰磐

WXX - M18(10g)



万象石 - 灰磐

WXX - 6281(10g)



万象石 - 灰磐

WXX - 6280(10g)



万象石 - 灰磐

WXX - M58(10g)

色卡颜色与实际材料颜色有少许差异为正常现象

It is normal for the color card color to differ slightly from the actual material color

100%
OMNISTONE
万象石

任何现代的涂料，合成材料都黯然失色
在灰泥 (Stucco) 面前

零污染，节能控温

100% 纯天然，零VOC

它是一种黏土涂层组成的，具有颜值高
它是从天然采石场中提取的生物黏土
与传统合成涂料不同
他们都取自大自然拥有的颜色
均使用赭石颜料，亦即无机矿物颜料
目前全系列灰泥材料

支持环保事业

正如我们一如既往的

We will continue as always
Support the
environmental protection cause



地球的颜色？
为什么是



100%
OMNISTONE

万象石

大自然是万磊永恒的股东之一
天然的纹理才是最好看, 最经典, 最永恒的

Nature is one of Vanlei's eternal shareholders.
Natural textures are the most beautiful, the most classic
and the most eternal.

我们忠于自然界的原材料, 取材天然矿物石粉
100%承诺并无掺入异类有机色浆或额外的防腐剂

We are loyal to the raw materials in nature,
using natural mineral stone powder, and 100% promise that no foreign
organic color paste or additional preservatives are added.

VAN
LIME

SERIES



阅石留痕 / 系列

CN.	
产品综述 /	“万象石”，在无意的表达中，贯穿了山石，土壤，矿物，风化，雨水冲刷后的痕迹，都可能在这一产品中形成不同层次的视觉语言 它并不指向单一自然形态，而是对多种自然现象的综合性表达。环保材料体系使其在表现多层纹理时仍保持稳定与可控性，不产生工业化塑料质感 在着色上，我们提供了多种配色方案，用以贯穿自然界的几种岩层 / 石材的效果、肌理，颜色形态，适用于展厅、商业空间及酒店大堂，用于承载较开放的空间叙事，使空间具有更强的包容性与延展性。更重要的是，它一次成型且无须更多雕刻技巧
主要成分 /	充分调配的熟石灰，精细大理石粉，无机颜 / 填料，纳米碳酸钙粉
准备工具 /	批刀 - YG114, 铲刀 - YG075, 羊毛滚筒 - YG090, 打磨机 - YG162
色浆混合 /	使用天然石料颜色，无机色浆调色
适用范围 /	适用于内外墙墙面使用，家居空间或商业空间亦可
配套产品 /	万磊渗透底漆 + 万磊万象石 + 万磊极致哑光罩面
基面处理 /	参考环境条件温度 -25°C, 湿度 ≤ 60 ①基层应平整、干净无油污，空鼓，并具有较好的强度，方可施工。 ②旧墙翻新：铲平基层，清除松动的表层部分，清洁粉尘油垢等杂质后方可施工。 ③基材必须完全干燥无尘和盐渍。如有必要，使用特定产品重新铺设或加固表面
参考用量 /	4.5-5kg/ m² 1 遍
EN.	
Product Overview /	“Omnistone”, Unintentionally expressed, traces of rocks, soil, minerals, weathering, and rainwater erosion may form different levels of visual language in this product It does not refer to a single natural form, but rather a comprehensive color expression of multiple natural phenomena. The environmentally friendly material system ensures stability and controllability even when displaying multi-layer textures, without producing industrial plastic texture In terms of coloring, we offer a variety of color schemes to achieve the effect, texture, and color form of several rock layers/stones that run through nature. They are suitable for exhibition halls, commercial spaces, and hotel lobbies, and are used to carry more open space narratives, making the space more inclusive and extensible. More importantly, it can be molded in one go without the need for additional carving techniques
Main ingredients /	Fully blended hydrated lime, fine marble powder, inorganic pigments/fillers, nano calcium carbonate powder
Tool /	Batch knife - YG114, shovel - YG075, wool drum - YG090, grinder - YG162
Color Mixing /	Use natural stone color and inorganic color paste for color matching
Application /	Suitable for use on interior and exterior walls, as well as in home or commercial spaces
Matching products /	Vanlei penetrating primer + Vanlei Omnistone + Vanlei Ultimate matte finish
Coverage rate /	4.5-5kg/m² 1 times



01
辊涂万磊金装白色/透明底漆(1/2遍)
兑水15-20%使用
Roller coated Vanlei Gold white/transparent primer (1/2 coat) Mix 15-20% water for use



02
平批一遍，控制在一个颗粒厚度，表面均匀
半干后收光至表面平整
Batch once, control to ensure uniform particle thickness After semi drying, let it shine until the surface is smooth



彻底干燥后，进行打磨

打磨工序：
80粗磨 — 180细打 — 320目精磨

After thorough drying, polish

Polishing process:
80 coarse grinding -180 fine grinding -320 mesh fine grinding



04
罩面层(推荐使用极致哑光罩面)，均匀
辊涂两遍（加水10-15%）
Cover layer (recommended to use ultimate matte cover) uniform Roll coating twice (add 10-15% water)

佛山市南海万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地（代码FS）

佛山市南海区狮山镇松岗万石管理区
象头岗万石村工业路1、2、5号

广州分公司

广州市荔湾区羊城装饰材料市场172号

广西生产基地（代码QT）

广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

△ 注意

公司根据产品技术和发展需要，有权对产品配方进行更新升级，而不对外另行公布，请以最新样板册颜色为准，不便之处，敬请原谅！

4000-147-187 www.fswanlei.com